

Stock code 6 0 3 9 1 5

GUOMAO
国 茂 股 份



传动精品 传递真情


摆线针轮减速机 Cycloidal Reducer

Product Sample N0.002
Version V3.5-2022

Product Overview

产品总览

NO.001

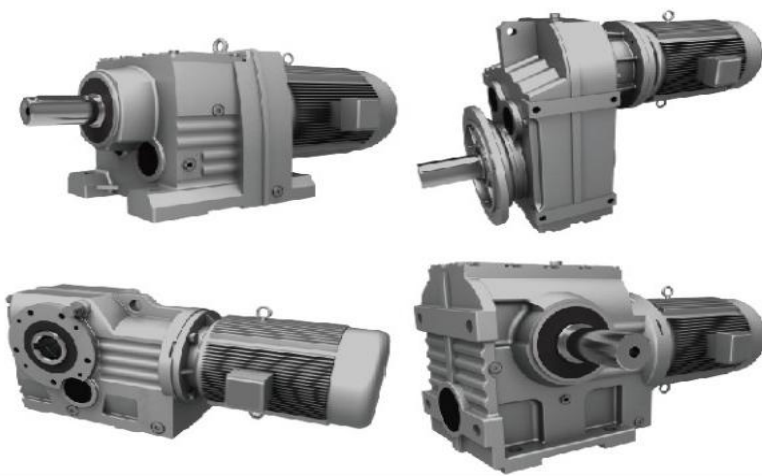

G系列减速机

G Series Gear Reducer

NO.002



摆线针轮减速机

Cycloidal Reducer

NO.003



ZY系列圆柱齿轮减速机

ZY Series Cylindrical Gear
Reducer

NO.003B



**DBY/DCY 系列圆锥圆柱
齿轮减速机**

DBY/DCY Series Sevel Gear
Reducer


NO.004



HB 系列工业齿轮箱

HB Series Gear Reducer

NO.005

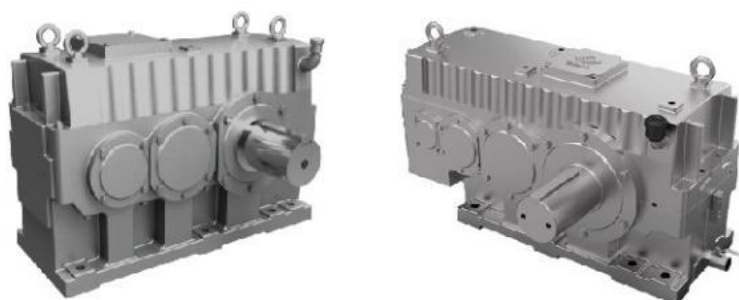

GM 系列齿轮减速机

GM Series Reducer


NO.005B



GMC 系列齿轮减速机

GMC Series Reducer

NO.006

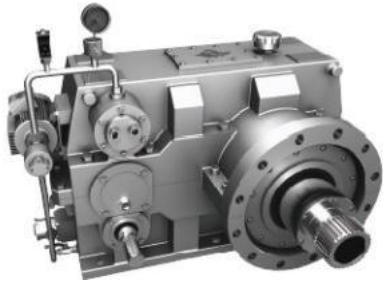

橡塑专用减速机

Plastic and Rubber Special Reducer



NO.007



GX系列行星齿轮减速机

GX Series Planetary Gear Reducer

NO.008



工程机械减速机

Engineering Machinery Reducer

NO.009



精密减速机
Precision Reducer

NO.010



重载齿轮箱
Heavy-duty Gearbox

N0.011



交流感应伺服电机
Ac Induction Servo Motor

N0.012



起重专用减速机
Lifting Special Reducer



Cycloidal Reducer

摆线针轮减速机

1 Product Overview

1.1 Product features

The cycloidal reducer is based on JB/T2982. It adopts the principle of planetary transmission with few gear differences and a novel transmission mechanism with cycloidal needle and gear meshing, which is widely applied in the fields of textile printing and dyeing, light industry and food, metallurgical miners, petrochemicals, lifting and transportation, and engineering machinery as a driving and deceleration device.

1) High ratio and high efficiency

Single-stage transmission can achieve a reduction ratio of 1: 87, and the efficiency is over 90%. The reduction ratio is even greater if multi-stage transmission is used.

2) Compact structure and small volume

The planetary transmission principle is adopted, and the input shaft and the output shaft are on the same axis, so the structure is compact and the volume is small.

3) Easy assembly, disassembly, and maintenance

The structure design is reasonable, the assembly and disassembly are simple, and the maintenance is convenient.

4) Smooth operation and low noise

The cycloidal pin gear has a large number of teeth in engagement, a large overlap coefficient and a mechanism of smooth machine parts, so that the vibration and noise are controlled to a minimum.


5) Reliable service and long life

The main transmission meshing parts are made of bearing steel, which has good mechanical properties, smooth rolling friction, and is more durable and long life.

6) Strong overload capacity, impact resistance and small moment of inertia.

It is suitable for occasions with frequent starting and forward and reverse rotation.

1.2 Internal structure

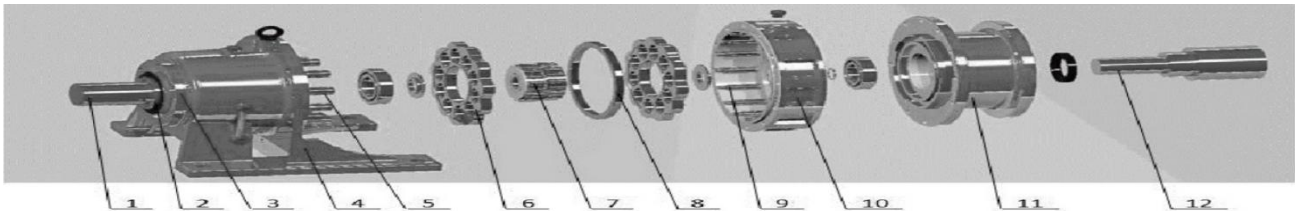


1. Output shaft 2. Fastening ring 3. Small end cover 4. Machine base 5. Pin shaft and pin sleeve 6. Cycloidal wheel 7. Eccentric bearing 8. Spacer ring 9. Wheel pin and pin sleeve 10. Needle gear housing 11. Motor connector 12. Input shaft

1.3 List of models

Level 1	Series B	09	0	1	2	3	4		5	6	7	8	9	
	Series X	1	2	3	4	5	6	7	8	9	10	11	12	
Level 2	Series B	10	20	31	41	42	52	53	63	64	74	84	85	95
	Series X	32	42	53	63	64	84	85	95	96	106	117	118	128
Level 3	Series B	2009	320	420	531	631	742	852	953					
	Series X	421	542	642	853	953	1064	1184	1285					

1.4 Model expression method

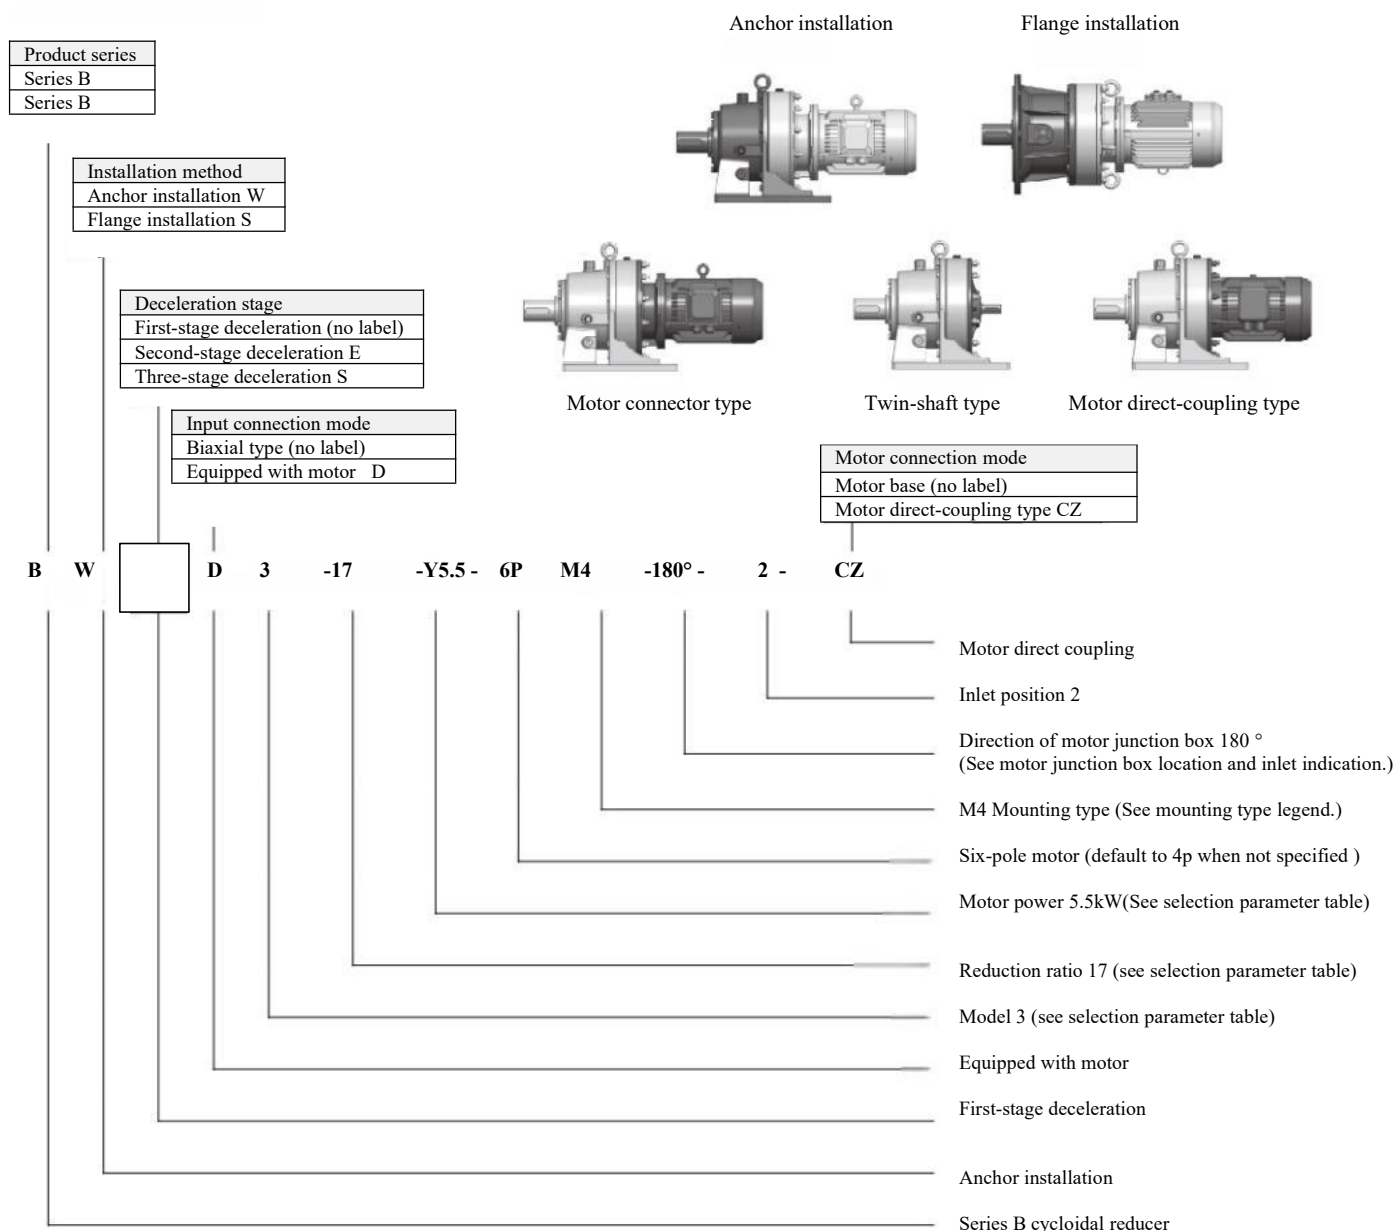


1.5 Overview of reduction ratio

Level 1	7	9	11	13	15	17	19	23
	29	35	43	59	71	87		
Level 2	99 (11×9)	121 (11×11)	187 (17×11)	289 (17×17)	319 (29×11)	391 (23×17)	493 (29×17)	595 (35×17)
	649 (59×11)	731 (43×17)	841 (29×29)	1003 (59×17)	1225 (35×35)	1357 (59×23)	1505 (43×35)	1849 (43×43)
	2065 (59×35)	2537 (59×43)	3053 (71×43)	3481 (59×59)	4189 (71×59)	5133 (87×59)	6177 (87×71)	7569 (87×87)
Level 3	8041 ~ 658503							

Notes: 1. The reduction ratio provided by the first-stage transmission can be combined with the second-stage and third-stage transmissions;
2. The general combination principle of second-stage and third-stage reduction ratios is: the high-speed end is the end with the smaller reduction ratio, and the low-speed end is the end with the larger reduction ratio.


1.6 Configuration of motor junction box position and expression method of wire inlets

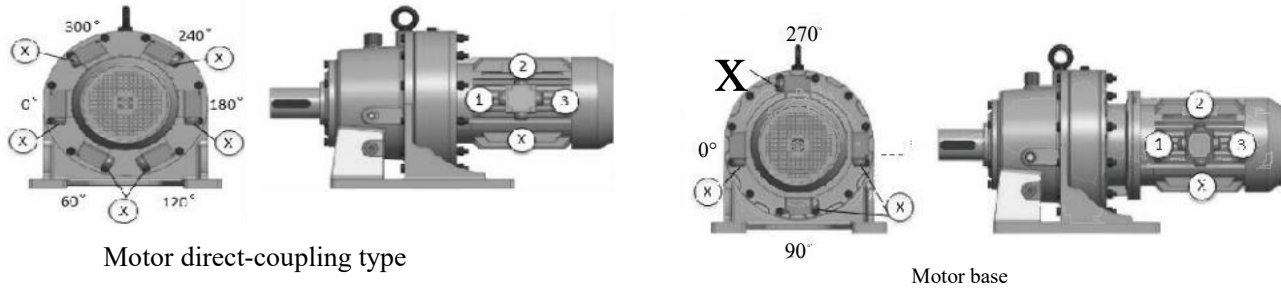

Notes:

1. When the direction of the junction box is not indicated, it defaults to the 0° position in the diagram; It defaults to the X position when the inlet position is not specified;
2. The direction of the junction box in the diagram is a commonly used configuration, please use it first;
3. The above picture is also applicable to secondary and tertiary transmission models.
4. Please contact the technical department of our company if you have any other special requirements.

1.7 Legend of mounting mode

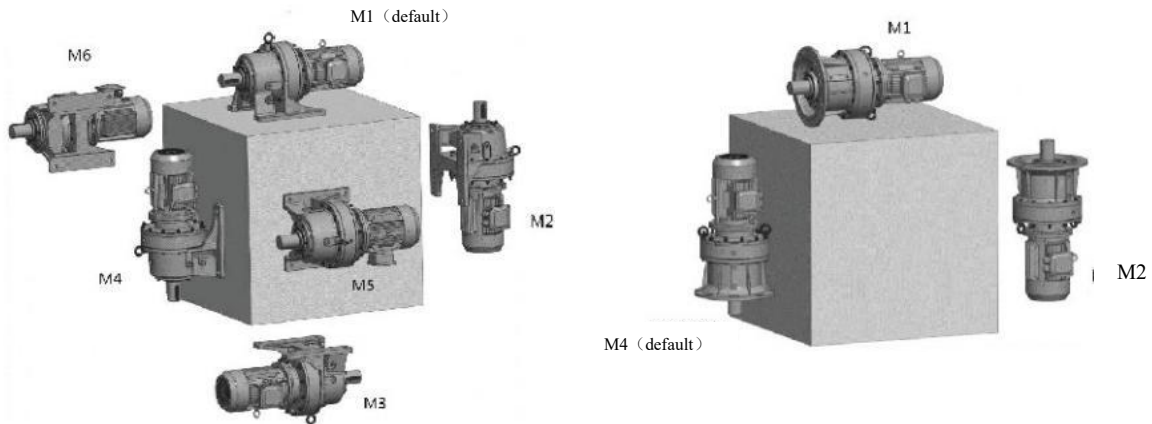

Note: When mounted on the ground, M1 is the default installation type; M4 is the default installation style when flanged installation. (It can be ignored when writing model number) Please give priority.

1.8 Comparison table of various standard models of reducer

Reducer standard	Level 1													
JB/T2982-94A	X1	X2	X3	X4	X5	X6	X7	X8	X9	X10	X11	X12		
JB/T2982-94B	B09	B0	B1	B2	B3	B4		B5	B6	B7	B8	B9		
JB/T2982-81		B12	B15	B18	B22	B27		B33	B39	B45	B55	B65		
Shanghai Standard	B10A	B10	B11	B12	B13	B14	B14A	B15	B16	B17	B18	B19		
			B11A	B12B	B13B				B16B					
Reducer standard	Level 2													
JB/T2982-94A	X32	X42	X53	X63	X64	X74	X84	X85	X95	X96	X106	X117	X118	X128
JB/T2982-94B	B10	B20	B31	B41	B42		B52	B53	B63	B64	B74	B84	B85	B95
JB/T2982-81	B1512	B1812	B2215	B2715	B2718		B3318	B3322	B3922	B3927	B4527	B5527	B5533	B6533
Shanghai Standard	B110A	B120A	B131A	B141A	B142A		B152	B153	B163	B164	B174	B184A		B195

Note: The performance indexes of corresponding machine models of various standards are basically the same, but the shape, installation and connection dimensions are slightly different. The above models can be produced by our company, please give priority to JB/T2982 standard products.

2 Selection Information

2.1 Selection steps

1. Selection of installation method

It is generally determined by the user according to the installation arrangement.

2. Determination of actual working condition coefficient f_A

1) General requirements for use

f_A It is mainly determined by the load characteristics, working time and start-stop times of the working machine. Namely: $f_A = f_{Ah} \times f_{Ac}$.

Wherein f_{Ah} is a working condition coefficient determined by two factors: load characteristics and working time. The f_{Ah} for commonly used machines can be selected with reference to the working condition factor f_{Ah} . The working condition coefficients of other working machines can be determined by analogy.

Wherein f_{Ac} is determined by the number of starts and stops. It can be determined by referring to the table working condition factor f_{Ac} . Note that starting and stopping should be counted once.

2) General requirements for use

If the ambient temperature is particularly high, consider increasing the temperature working condition coefficient f_{At} . It can be determined by referring to the table working condition factor f_{At} .

The necessary safety factor f_{As} is added if the reducer is to have a particularly high reliability.

Please contact our technical department if the value cannot be determined.

3. The determination of model (specification)

It must meet the requirements $f_B \geq f_A$

1) The motor and the reducer are directly connected or connected through a coupling.

a. Find the corresponding motor power and number of poles in the selection parameter table.

b. A model with similar transmission ratio is preliminarily selected at this power and number of poles, and its service coefficient f_B is recorded.

c. If compared, then it is the available model if the conditions are met $f_B \geq f_A$. Otherwise, enlarge the model until the conditions are met.

2) There is a front reduction connection between the motor and the reducer.

If the motor and the reducer are connected through gears, belts, sprockets and other reduction devices, the motor power must be converted to the input shaft of the reducer due to the increase of input torque, that is, the motor power must be multiplied by the transmission ratio of the front reduction device. The converted power is selected according to the method in (1) above. At this time, it is still necessary to pay attention to the unchanged number of motor poles.

4. Radial load calibration

It will produce a large radial load when the shaft head of the reducer is equipped with gears, pulleys and sprockets. At this time, a radial load calibration must be performed. Methods: See the relevant contents in the definition of selection parameters. A larger size model can be selected if the radial load exceeds the allowable value.

2.2 List of working condition coefficients

Working condition factor f_{Ah}							
Application	8h/day	16h/day	24h/day	Application	8h/day	16h/day	24h/day
Food industry				Grinding mill			
Crusher	1.75	2	2.25	Ball mill and rod mill	1.75	1.75	1.75
Beet slicer and kneading machine	1.25	1.5	1.75	Hammer mill and pulverizer	1.5	1.75	2
Meat chopper	1.25	1.5	1.5	Printing and papermaking technology			
Filling machine	0.8~1*	1	1.25	Cutting machine	1	1.25	1.5
Dough mixer	1	1.25	1.5	Reel	0.8~1*	1	1.25
Extruder	1.25	1.5	1.75	Packing feeder	1	1.25	1.25
Sugarcane chopper	1.75	1.75	1.75	Elevator			
Sugar manufacturing machine	1.75	1.75	1.75	Hoist	1.25	1.5	1.75
Toaster	1.25	1.25	1.25	Freight elevator	1.25	1.5	1.75
Auxiliary power and servomotor				Escalator	1.25	1.25	1.5
Micro-motion device without load	0.8~1*			Textile industry			
Ordinary load	1.25	1.25	1.25	Weaving machine	1.25	1.5	1.75
Compressor				Spinning machine	0.8~1*	1	1.25
Centrifugal	1	1.25	1.5	Washing machine	1	1.25	1.5
Axial flow type	1	1.25	1.5	Conveyor			
Filter	1	1.25	1.5	Bucket conveyor	1.5	1.75	1.75
Construction industry				Balanced loading or feeding	0.8~1*	1	1.25
Cement mixer	1.25	1.5	1.75	Heavy-duty chain and screw conveyor	1.25	1.5	1.5
Cement plant	1.5	1.75	2	Vibrating conveyor	1.5	1.75	2
Stucco spray machine	0.8~1*	1	1.25	Winding engine	1.5	1.75	1.75
Generator	0.8~1*	1	1.25	Belt conveyor	1.25	1.5	1.5
Water treatment and environmental protection				Winch	1.5	1.75	1.75
Aerator	1.75	2	2	Scraper conveyor	1.25	1.25	1.5
Common ventilation device	1.5	1.5	1.5	Fan			
Carousel-type ventilation device	1.75	1.75	1.75	Centrifugal fan	0.8~1*	1	1.25
Bar-grided sieve collector	0.8~1*	1	1.25	Industrial fan	1	1.25	1.5
Screw pump	1	1.25	1.5	Cooling tower power	1.75	1.75	1.75
Sifter				Cooling tower fan	1.75	2	2
Rotary type (stone, sand)	1	1.25	1.5	Packaging machinery			
Mobile suction machine	0.8~1*	1	1.25	Cardboard stacking machinery	1.25	1.5	1.75
Agricultural machinery				Packing machine	0.8~1*	1	1.25
Fertilizer and soil leveler	0.8~1*	1		Machine tool equipment			
Harvester	0.8~1*	1		Plane creation bed, gantry creation bed, and bending mill	1.25	1.5	1.75
Hoisting machinery				Main power and feed power	1	1.25	1.5
Traveling mechanism	1.5	1.75	2	Feed and auxiliary power	0.8~1*	1	1.25
Slewing mechanism	1.25	1.5	2	Press	1.75	2	2
Lifting mechanism	1.25	1.5	1.75	Bender	1.5	1.75	2
Jib crane	1.25	1.5	1.75	Plate shearing machine	1.75	2	2
Mixer				Iron and steel industry			
Uniform density	1.25	1.5	1.5	Wire drawing machine	1.25	1.5	1.75
Uneven density	1.5	1.75	1.75	Winding machine	1.25	1.75	1.75
Wood and plastics industries				Roller table: no gyration			
The main power of a chainsaw	1.5	1.75	2	Combined pulling force	1.25	1.5	1.75
The feed power of a chainsaw	1	1.25	1.5	Independent power	1.5	1.75	2
Stumper	1.5	1.75	2	Pump			
Plywood gluing machine	0.8~1*	1	1.25	Centrifugal fan	1	1.25	1.5
Drilling machine	0.8~1*	1	1.25	Rotary type, gear type, impeller type, and blade type	0.8~1*	1	1.25
Extruder	1.25	1.5	1.75	Piston pump: single-cylinder	1.5	1.75	2
Mixer				Multi-cylinder	1.25	1.5	1.75
Pure liquid (uniform density)	1.25	1.5	1.5	Screw pump	1	1.25	1.5
Liquid with non-uniform density	1.5	1.75	2				
Liquids and solids	1.5	1.75	2				

Working condition factor f_{AC}	
Number of starts and stops/hour	
<10	1
<100	1.15
<500	1.25

Working condition factor f_{At}					
Environment	+20°C...	+20°C...	+30°C...	+40°C...	+50°C...
Temperature		+30°C...	+40°C...	+50°C...	+60°C...
f_{At}	1	1.05	1.15	1.3	1.5

Note: * = 0.8, there is no radial load effect if the running time is less than 3 hours/day.

These working condition coefficients are especially suitable for occasions where the motor is the main power. Please contact our company technical department for special application designs, such as frequent start-stop and forward and reverse rotation.

2.3 Definition of selection parameters

Selection parameter table:

P [kW]: Motor power.

n_a [r/min]: Output RPM. It is calculated by referring to the speed of the motor when it is fully loaded and the transmission ratio of the reducer, and the unit is rpm.

M_a [Nm]: The torque that can be generated on the output shaft when the motor is fully loaded. This output torque has taken into account the transmission efficiency of the reducer.

[i]: The reduction ratio of the reducer from input to output.

F_{ra} [kN]: Allowable radial load at the midpoint of the output shaft extension (when the load action point is at the shaft end, in the table F_{ra} should be multiplied by 0.4). The product of the actual radial load F_r of the working element and the actual operating condition coefficient f_A shall not exceed this value, that is, $f_A \times F_r \leq F_{ra}$ (f_A can refer to the instructions in selection step 2).

The value of F_r for general working components can be calculated by the following equation:

$$f_r = M_r \times f_r / r \text{ (N)}$$

Wherein: M_r Working torque of working element (Nm)

r-Pitch radius of working element(m)

f_r -Radial load factor (please refer to the following values)

Single-row sprocket	$f_r=1$	V-belt	$f_r=1.5$
One gear or double-row sprocket	$f_r=1.25$	Flat-belt	$f_r=2.5$


f_B : Coefficient of use, the ratio of the rated power of the reducer to the rated power of the motor used. It is the strength basis for choosing reducer specifications.

Machine model: that is, the model and specification number of the reducer (see the list of reducer models for details). Its structural dimensions can be found in the corresponding external installation dimension chart.

Number of poles: Number of motor poles, the reducer can be equipped with four-pole or more motors.

2.4 Radial force check and verification

When the actual action point is not in the middle of the output shaft extension, the following formula is needed to calculate the allowable radial force value in the selection table.

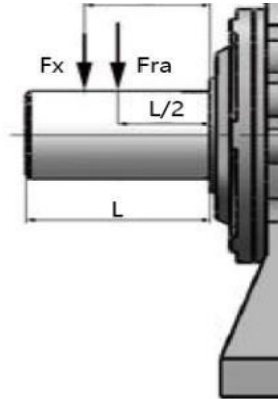

When $0 \leq X < L/2$, $F_x = [1.25 - (X/2L)] \times F_{ra}$ [N]

When $X = L/2$, $F_x = F_{ra}$ [N]

When $L/2 < X \leq L$, $F_x = [1.6 - (1.2 X/L)] \times F_{ra}$ [N]

F_{ra} - The allowable load given in the selection table (acting at $X=L/2$).


F_x is the allowable radial load at the actual point of application.

X - Distance from shoulder to actual action point of load in sample

L - Extension of output shaft (length given in this sample, refer to the overall installation dimensions chart)

The product of the actual radial load F_r of the working element and the actual operating condition coefficient f_A shall not exceed the allowable radial load F_x at the actual operating point, i.e. $f_A \times F_r \leq F_x$

2.5 Notes on selection parameter table

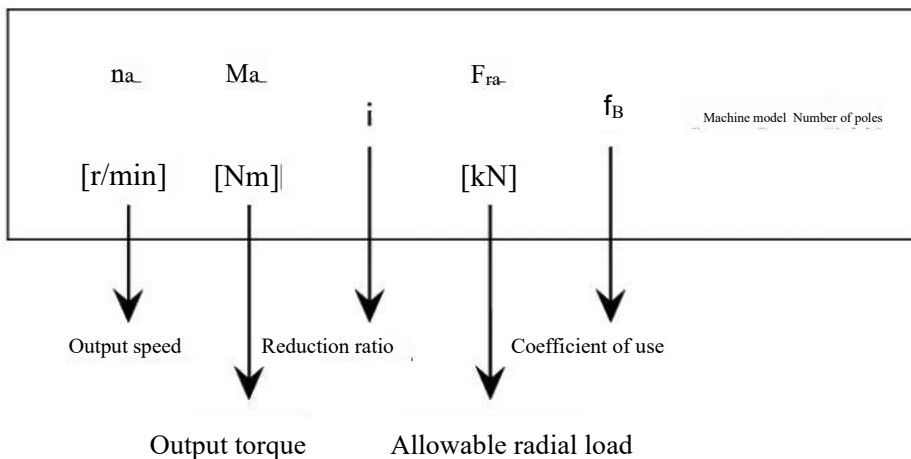

摆线针轮减速机

2.6 Selection parameter table

Na	Ma	i	Fra	f _b	Machine model	Number of poles	Na	Ma	i	Fra	f _b	Machine model	Number of poles			
[r/min]	[Nm]		[kN]				[r/min]	[Nm]		[kN]						
0.18kW			Frequency	Hz	50		0.18kW			Frequency	Hz	50				
			Number of poles	P	4	6				Number of poles	P	4	6			
			Rotational speed n	r/min	1315	850				Rotational speed n	r/min	1315	850			
0.26	600	5133	8.0	0	B20 X42	4P	30.6	51	43	1.2	1.35	B09 X1	4P			
0.31	600	4189	8.0	0			37.6	41	35	1.2	1.85					
0.38	600	3481	8.0	0			45.3	34	29	1.2	1.85					
0.43	600	3053	8.0	0			57.2	27	23	1.0	1.85					
0.52	600	2537	8.0	0			77.4	20	17	1.0	2.75					
0.64	600	2065	8.0	0			87.7	18	15	1.0	2.75					
0.71	600	1849	8.0	0			101.2	15	13	0.8	2.75					
0.81	600	1633	8.0	0			119.5	13	11	0.8	2.75					
0.87	600	1505	8.0	0			0.25kW		Frequency	Hz	50			B41 X63	4P	
0.97	600	1357	8.0	0					Number of poles	P	4					6
1.1	600	1225	8.0	0					Rotational speed n	r/min	1340	855				
1.3	500	1003	8.0	0			0.22	2500	6177	15.7	0					
1.6	500	841	8.0	0			0.26	2500	5133	15.7	0					
1.8	500	731	8.0	0			0.32	2500	4189	15.7	0					
2.0	600	649	8.0	0			0.38	2500	3481	15.7	0					
2.2	583	595	8.0	1.00			0.44	2500	3053	15	0					
2.7	483	493	8.0	1.20			0.53	2500	2537	15.7	0					
3.4	383	391	8.0	1.55			0.65	2500	2065	15.7	0					
4.1	313	319	8.0	1.90			0.72	2489	1849	15.7	1.00					
4.6	283	289	8.0	2.10			0.82	2199	1633	15.7	1.10					
5.2	248	253	8.0	2.40	0.89	2026	1505	15.7	1.20							
7.0	183	187	8.0	3.25	1.0	1813	135	15.7	1.35							
8.0	162	165	8.0	3.65	1.1	1637	1225	15.7	1.50							
9.2	140	143	8.0	3.75	1.3	1340	1003	15.7	1.85							
10.9	119	121	8.0	3.75	1.6	1124	841	15.7	2.20							
0.31	240	4189	5.2	0	1.8	977	731	15.7	2.50							
0.38	240	3481	5.2	0	2.1	867	649	15.7	2.85							
0.43	240	3053	5.2	0	2.3	795	595	15.7	3.10							
0.52	240	2537	5.2	0	2.7	659	493	15.7	3.75							
0.64	240	2065	5.2	0	0.22	1250	6177	11.6	0							
0.71	240	1849	5.2	0	0.26	1250	5133	11.6	0							
0.81	240	1633	5.2	0	0.32	1250	4189	11.6	0							
0.87	240	1505	5.2	0	0.38	1250	3481	11.6	0							
1.0	240	135	5.2	0	0.44	1250	3053	11.6	0							
1.1	240	1225	5.2	0	0.53	1250	2537	11.6	0							
1.3	240	1003	5.2	0	0.65	1250	2065	11.6	0							
1.6	240	841	5.2	0	0.72	1250	1849	11.6	0							
1.8	240	731	5.2	0	0.82	1250	633	11.6	0							
2.0	240	649	5.2	0	0.89	1250	1505	11.6	0							
2.2	240	595	5.2	0	1.0	1250	1357	11.6	0							
2.7	240	493	5.2	0	1.1	1250	1225	11.6	0							
3.4	240	391	5.2	0	1.3	1250	1003	11.6	0							
4.1	240	319	5.2	0	1.6	1124	841	11.6	1.10							
4.6	240	289	5.2	0	1.8	977	731	11.6	1.25							
5.2	240	253	5.2	0	2.1	867	649	11.6	1.40							
7.0	183	187	5.2	1.30	2.3	795	595	11.6	1.55							
8.0	162	165	5.2	1.45	2.7	659	493	11.6	1.85							
9.2	140	43	5.2	1.70	3.4	522	391	11.6	2.35							
10.9	119	121	5.2	1.95	4.2	426	319	11.6	2.90							
13.3	97	99	5.2	2.40	4.6	386	289	11.6	3.20							
22.3	69	59	3.0	1.85	5.3	338	253	11.6	3.65							
30.6	51	43	3.0	2.75	0.26	600	5133	8.0	0							
37.6	41	35	2.9	2.75	0.32	600	4189	8.0	0							
45.3	34	29	2.9	4.10	0.38	600	3481	8.0	0							
57.2	27	23	2.4	4.10	0.44	600	3053	8.0	0							

Notes:

1. Models with * cannot be equipped with direct-connected motors;
2. Models with "O" in the f_b column cannot use motors with 100% power. Please keep the load torque below "Ma" in the table during operation. Please install your own security device to protect the host;
3. All models can be configured with 6P and 8P motors corresponding to the same motor base number;
4. The allowable output torque and allowable radial force values of the three-stage transmission refer to the maximum values in the two-stage transmission.

Selection parameter table

Na	Ma	i	Fra	f _B	Machine model	Number of poles	Na	Ma	i	Fra	f _B	Machine model	Number of poles		
[r/min]	[Nm]		[kN]				[r/min]	[Nm]		[kN]					
0.25kW			Frequency	Hz	50		0.25kW			Frequency	Hz	50			
			Number of poles	P	4	6				Number of poles	P	4	6		
			Rotational speed n	r/min	1340	855				Rotational speed n	r/min	1340	855		
0.53	600	2537	8.0	0	B20 X42	4P	31.2	69	43	1.2	0.95	B09 X1	4P		
0.65	600	2065	8.0	0			38.3	56	35	1.2	1.35				
0.72	600	1849	8.0	0			46.2	47	29	1.2	1.35				
0.82	600	1633	8.0	0			58.3	37	23	1.0	1.35				
0.89	600	1505	8.0	0			78.8	27	17	1.0	1.95				
1.0	600	1357	8.0	0			89.3	24	15	1.0	1.95				
1.1	600		8.0	0			103.1	21	13	0.8	1.95				
1.3	600	1003	8.0	0			121.8	18	11	0.8	1.95				
1.6	600	841	8.0	0			148.9	14	9	0.8	2.60				
1.8	600	731	8.0	0			0.37kW		Frequency	Hz	50				
2.1	600	649	8.0	0					Number of poles	P	4			6	
2.3	600	595	8.0	0					Rotational speed n	r/min	1340			885	
2.7	600	493	8.0	0			0.22	2500	6177	15.7	0			B41 X63	4P
3.4	522	391	8.0	1.10			0.26	2500	5133	15.7	0				
4.2	426	319	8.0	1.35			0.32	2500	4189	15.7	0				
4.6	386	289	8.0	1.50			0.38	2500	3481	15.7	0				
5.3	338	253	8.0	1.75			0.44	2500	3053	15.7	0				
7.2	250	187	8.0	2.35			0.52	2500	2537	15.7	0				
8.1	220	165	8.0	2.70	0.65	2500	2065	15.7	0						
9.4	191	143	8.0	3.10	0.72	2500	1849	15.7	0						
11.1	162	121	8.0	3.65	0.82	2500	1633	15.7	0						
0.32	240	4189	5.2	0	0.89	2500	1505	15.7	0						
0.38	240	3481	5.2	0	0.99	2500	1357	15.7	0						
0.44	240	3053	5.2	0	1.1	2500	1225	15.7	0						
0.53	240	2537	5.2	0	1.3	1984	1003	15.7	1.00						
0.05	240	2065	5.2	0	1.6	1663	841	15.7	1.20						
0.72	240	1849	5.2	0	1.8	1446	731	15.7	1.40						
0.82	240	1633	5.2	0	2.1	1284	649	15.7	1.60						
0.89	240	1505	5.2	0	2.3	1177	595	15.7	1.75						
1.0	240	135	5.2	0	2.7	975	493	15.7	2.10						
1.1	240	1225	5.2	0	3.4	773	391	15.7	2.65						
1.3	240	1003	5.2	0	4.2	631	319	15.7	3.25						
1.6	240	841	5.2	0	4.6	572	289	15.7	3.60						
1.8	240	731	5.2	0	0.22	1250	6177	11.6	0	B31 X53	4P				
2.1	240	649	5.2	0	0.26	1250	5133	11.6	0						
2.3	240	595	5.2	0	0.32	1250	4189	11.6	0						
2.7	240	493	5.2	0	0.38	1250	3481	11.6	0						
3.4	240	391	5.2	0	0.44	1250	3053	11.6	0						
4.2	240	319	5.2	0	0.53	1250	2537	11.6	0						
4.6	240	289	5.2	0	0.65	1250	2065	11.6	0						
5.3	240	253	5.2	0	0.72	1250	1849	11.6	0						
7.2	240	187	5.2	0	0.82	1250	1633	11.6	0						
8.1	220	165	5.2	1.05	0.89	1250	1505	11.6	0						
9.4	191	143	5.2	1.20	1.0	1250	135	11.6	0						
11.1	162	121	5.2	1.45	1.1	1250	1225	11.6	0						
13.5	132	99	5.2	1.80	1.3	1250	1003	11.6	0						
18.9	114	71	5.2	2.05	1.6	1250	841	11.6	0						
22.7	95	59	4.8	2.50	1.8	1250	731	11.6	0						
28.5	75	47	4.4	3.15	2.1	1250	649	11.6	0						
31.2	69	43	4.3	3.45	2.3	1177	595	11.6	1.05						
22.7	95	59	3.0	1.35	2.7	975	493	11.6	1.25						
31.2	69	43	3.0	2.00	3.4	773	391	11.6	1.60						
38.3	56	35	2.9	2.00	4.2	631	319	11.6	1.95						
46.2	47	29	2.9	2.95	4.6	572	289	11.6	2.15						
58.3	37	23	2.4	2.95	5.3	500	253	11.6	2.45						

Notes:

1. Models with * cannot be equipped with direct-connected motors;
2. Models with "O" in the f_B column cannot use motors with 100% power. Please keep the load torque below "Ma" in the table during operation. Please install your own security device to protect the host;
3. All models can be configured with 6P and 8P motors corresponding to the same motor base number;
4. The allowable output torque and allowable radial force values of the three-stage transmission refer to the maximum values in the two-stage transmission.

Selection parameter table

Na	Ma	i	Fra	f _b	Machine model	Number of poles	Na	Ma	i	Fra	f _b	Machine model	Number of poles		
[r/min]	[Nm]		[kN]				[r/min]	[Nm]		[kN]					
0.37kW					Frequency	Hz	50		0.55kW						
					Number of poles	P	4	6							
					Rotational speed n	r/min	1340	885							
7.2	370	187	11.6	3.35	B31 X53	4P	0.67	5000	2065	33.1	0	B52 X84	4P		
8.1	32b	165	11.6	3.60			0.75	5000	1849	33.1	0				
2.1	600	649	8.0	0	B20 X42	4P	0.85	4628	1633	33.1	1.05				
2.3	600	595	8.0	0			0.92	4265	1505	33.1	1.15				
2.7	600	493	8.0	0			1.0	3846	1357	33.1	1.30				
3.4	500	391	8.0	0			1.1	3472	1225	33.1	1.40				
4.2	500	319	8.0	0			1.4	2843	1003	33.1	1.75				
4.6	572	289	8.0	1.00			1.7	2383	841	33.1	2.05				
5.3	500	253	8.0	1.15			1.9	2072	731	33.1	2.40				
7.2	370	187	8.0	1.60			2.1	1830	649	33.1	2.70				
8.1	326	165	8.0	1.80			2.3	1686	595	33.1	2.95				
9.4	283	143	8.0	2.10			2.8	1397	493	33.1	3.55				
11.1	239	121	8.0	2.45	0.18	2500	7569	15.7	0	B42/X64/X74	4P				
13.5	196	99	8.0	2.70	0.75	2500	1849	15.7	0	B41 X63	4P				
5.3	240	253	5.2	0	0.85	2500	1633	15.7	0						
7.2	240	187	5.2	0	0.92	2500	150c	15.7	0						
8.1	240	165	5.2	0	1.0	2500	1357	15.7	0						
9.4	240	143	5.2	0	1.1	2500	1225	15.7	0						
11.1	240	121	5.2	0	1.4	2500	1003	15.7	0						
13.5	196	99	5.2	1.20	1.7	2383	841	15.7	1.00						
18.9	169	/1	5.2	1.40	1.9	2072	731	15.7	1.20						
22.7	140	59	4.8	1.70	2.1	1839	649	15.7	1.35						
28.5	112	47	4.4	2.10	2.3	1686	595	15.7	1.45						
31.2	102	43	4.3	2.30	2.8	1397	493	15.7	1.75						
38.3	83	35	3.8	2.85	3.6	1108	391	15.7	2.25						
46.2	69	29	3.2	3.45	4.4	904	319	15.7	2.75						
22.7	140	59	3.0	0.90	4.8	819	289	15.7	3.05	B31 X53	4P				
31.2	102	43	3.0	1.35	5.5	717	253	15.7	3.45						
38.3	83	35	2.9	1.35	1.4	1250	1003	11.6	0						
46.2	69	29	2.9	2.00	1.7	1250	841	11.6	0						
58.3	55	23	2.4	2.00	1.9	1250	731	11.6	0						
78.8	40	17	2.3	2.70	2.1	1250	649	11.6	0						
89.3	36	15	2.2	2.70	2.3	1250	595	16	0						
103.1	31	13	2.0	2.70	2.8	1250	493	11.6	0						
121.8	26	11	1.9	2.70	3.6	1108	391	11.6	1.10						
148.9	21	9	1.9	2.70	4.4	904	319	11.6	1.35						
191.4	17		1.5	2.70	4.8	819	289	11.6	1.50						
38.3	83	35	1.2	0.90	5.5	717	253	11.6	1.70	B20 X42	4P				
46.2	69	29	1.2	0.90	7.4	530	187	11.6	2.35						
58.3	55	23	1.0	0.90	8.4	468	165	11.6	2.65						
78.8	40	17	1.0	1.35	9.7	405	143	11.6	3.05						
89.3	36	15	1.0	1.35	11.5	343	121	11.6	3.60						
103.1	31	13	0.8	1.35	3.6	600	391	8.0	0						
121.8	26	11	0.8	1.35	4.4	600	319	8.0	0						
148.9	21	9	0.8	2.00	4.8	600	289	8.0	0						
0.55kW					Frequency	Hz	50		5.5			600	253	8.0	0
					Number of poles	P	4	6	7.4			530	187	8.0	1.10
					Rotational speed n	r/min	1390	885	8.4	468	165	8.0	1.25		
0.18	5000	7569	33.1	0	B52 X84	4P	9.7	405	143	8.0	1.45				
0.23	5000	6177	33.1	0			11.5	343	121	8.0	1.70				
0.27	5000	5133	33.1	0			14.0	281	99	8.0	1.80				
0.33	5000	4189	33.1	0			8.4	240	165	5.2	0				
0.40	5000	348	33.1	0			9.7	240	143	5.2	0				
0.46	5000	3053	33.1	0			11.5	240	121	5.2	0				
0.55	5000	2537	33.1	0			14.0	240	99	5.2	0				

Notes:

- Models with * cannot be equipped with direct-connected motors;
- Models with "O" in the f_b column cannot use motors with 100% power. Please keep the load torque below "Ma" in the table during operation. Please install your own security device to protect the host;
- All models can be configured with 6P and 8P motors corresponding to the same motor base number;
- The allowable output torque and allowable radial force values of the three-stage transmission refer to the maximum values in the two-stage transmission.

Selection parameter table

Na	Ma	i	Fra	f _B	Machine model	Number of poles	Na	Ma	i	Fra	f _B	Machine model	Number of poles
[r/min]	[Nm]		[kN]				[r/min]	[Nm]		[kN]			
0.55kW			Frequency	Hz	50		0.75kW			Frequency	Hz	50	
			Number of poles	P	4	6				Number of poles	P	4	6
			Rotational speed n	r/min	1390	885				Rotational speed n	r/min	1385	910
16.0	247	87	11.6	3.65	B3* X5*	4P	0.33	5000	4189	33.1	0	B52 X84	4P
19.6	201	71	11.6	3.65			0.40	5000	3481	33.1	0		
16.0	296	87	8.0	1.80	B2 X4	4P	0.45	5000	3053	33.1	0		
19.6	241	71	8.0	1.80			0.55	5000	2537	33.1	0		
23	201	59	7.4	2.70			0.67	5000	2065	33.1	0		
29.6	160	47	6.8	3.65			0.75	5000	1849	33.1	0		
32.3	146	43	6.7	3.65	B1 X3	4P	0.85	5000	1633	33.1	0		
39.7	119	35	6.0	3.65			0.92	5000	1505	33.1	0		
19.6	241	/1	5.2	0.90			1.0	5000	1357	33.1	0		
23.6	201	59	4.8	1.25			1.1	4751	1225	33.1	1.05		
29.6	160	47	4.4	1.50			1.4	3890	1003	33.1	1.25		
32.3	146	43	4.3	1.60			1.6	3262	841	33.1	1.50		
39.7	119	35	3.8	2.00			1.9	2835	731	33.1	1.75		
47.9	99	29	3.8	2.40			2.1	2517	649	33.1	1.95		
60.4	78	23	3.2	3.05			2.3	2308	595	33.1	2.15		
81.8	58	17	3.0	3.65			2.8	1912	493	33.1	2.60		
92.7	51	15	2.9	3.65	B0 X2	4P	3.5	1517	391	33.1	3.30		
106.9	44	13	2.8	3.65			1.0	2500	1357	15.7	0		
32.3	146	43	3.0	0.90			1.1	2500	1225	15.7	0		
39.7	119	35	2.9	0.90			1.4	2500	1003	15.7	0		
47.9	99	29	2.9	1.35			1.6	2500	841	15.7	0		
60.4	78	23	2.4	1.35			1.9	2500	731	15	0		
81.8	58	17	2.3	1.80			2.1	2500	649	15.7	0		
92.7	51	15	2.2	1.80			2.3	2308	595	15.7	1.05		
106.9	44	13	2.0	1.80			2.8	1912	493	15.7	1.30		
126.4	37	11	1.9	1.80			3.5	1517	391	15.7	1.65		
154.4	31	9	1.9	1.80	4.3	1237	319	15.7	2.00				
198.6	24	7	1.8	1.80	4.8	1121	289	15.7	2.20				
81.8	58	17	1.0	0.90	B09 X1	4P	5.5	981	253	15.7	2.55		
92.7	51	15	1.0	0.90			7.4	725	187	15.7	3.45		
106.9	44	13	0.8	0.90			2.1	1250	649	11.6	0		
126.4	37	11	0.8	0.90			2.3	1250	595	11.6	0		
154.4	31	9	0.8	1.20			2.8	1250	493	11.6	0		
0.75kW			Frequency	Hz	50		3.5	1250	391	11.6	0	B31 X53	4P
			Number of poles	P	4	6	4.3	1237	319	11.6	1.00		
			Rotational speed n	r/min	1385	910	4.8	1121	289	11.6	1.10		
0.18	8800	7569	52.9	0	B63* X95*	4P	5.5	981	253	11.6	1.25		
0.22	8800	6177	52.9	0			7.4	725	187	11.6	1.70		
0.27	8800	5133	52.9	0			8.4	640	165	11.6	1.95		
0.33	8800	4189	52.9	0			9.7	555	143	11.6	2.25		
0.40	8800	3481	52.9	0			11.4	469	121	11.6	2.65		
0.45	8800	3053	52.9	0			14.0	384	99	11.6	3.25		
0.55	8800	2537	52.9	0			4.8	600	289	8.0	0		
0.67	8009	2065	52.9	1.10			5.5	600	253	8.0	0		
0.75	7172	1849	52.9	1.20			600	187	8.0	0			
0.85	6334	1633	52.9	1.35			8.4	600	165	8.0	0		
0.92	5837	1505	52.9	1.50	9.7	555	143	8.0	1.05				
1.0	5263	1357	52.9	1.65	11.4	469	121	8.0	1.25				
1.1	4751	1225	52.9	1.85	14.0	384	99	8.0	1.35				
.4	3890	1003	52.9	2.25	11.4	240	121	8.0	0				
1.6	3262	841	52.9	2.70	14.0	240	99	8.0	0				
1.9	2835	731	52.9	3.10	15.9	405	87	11.6	2.70				
0.18	5000	7569	33.1	0	B52 X84	4P	19.5	330	71	11.6	2.70		
0.22	5000	617	33.1	0			23.5	275	59	10.8	3.70		
0.27	5000	5133	33.1	0									

Notes:

- Models with * cannot be equipped with direct-connected motors;
- Models with "O" in the f_B column cannot use motors with 100% power. Please keep the load torque below "Ma" in the table during operation. Please install your own security device to protect the host;
- All models can be configured with 6P and 8P motors corresponding to the same motor base number;
- The allowable output torque and allowable radial force values of the three-stage transmission refer to the maximum values in the two-stage transmission.

Selection parameter table

Na	Ma	i	Fra	f _B	Machine model	Number of poles	Na	Ma	i	Fra	f _B	Machine model	Number of poles
[r/min]	[Nm]		[kN]				[kN]	[r/min]		[Nm]			
0.75kW			Frequency	Hz	50		1.1kW			Frequency	Hz	50	
			Number of poles	P	4	6				Number of poles	P	4	6
			Rotational speed n	r/min	1385	910				Rotational speed n	r/min	1390	910
15.9	405	87	8.0	1.35	B2 X4	4P	1.4	5000	1003	33.1	O	B52 X84	4P
19.5	330	71	8.0	1.35			1.7	4767	841	33.1	1.05		
23.5	275	59	7.4	1.95			1.9	4143	731	33.1	1.20		
29.5	219	47	6.8	2.70			2.1	3679	649	33.1	1.35		
32.2	200	43	6.7	2.70			2.3	3373	595	33.1	1.45		
39.6	163	35	6.0	2.70			2.8	2794	493	33.1	1.80		
47.8	135	29	6.0	3.95			3.6	2216	391	33.1	2.25		
23.5	275	59	4.8	0.85	B1 X3	4P	4.4	1808	319	33.1	2.75	B41 X63	4P
29.5	219	47	4.4	1.10			4.8	1638	289	33.1	3.05		
32.2	200	43	4.3	1.20			5.5	1434	253	33.1	3.50		
39.6	163	35	3.8	1.45			1.7	2500	841	15.7	0		
47.8	135	29	3.8	1.75			1.9	2500	731	15.7	0		
60.2	107	23	3.2	2.25			2.1	2500	649	15.7	0		
81.5	79	17	3.0	2.70			2.3	2500	595	15.7	0		
92.3	70	15	2.9	2.70			2.8	2500	493	15.7	0		
106.5	61	13	2.8	2.70			3.6	2216	391	15.7	1.10		
125.9	51	11	2.6	3.95			4.4	1808	319	15.7	1.35		
153.9	42	9	2.6	3.95	4.8	1638	289	15.7	1.50				
197.9	33	7	2.5	3.95	5.5	1434	253	15.7	1.75				
47.8	135	29	2.9	0.95	B0 X2	4P	7.4	1060	187	15.7	2.35	B31 X53	4P
60.2	107	23	2.4	0.95			8.4	935	165	15.7	2.65		
81.5	79	17	2.3	1.35			9.7	811	143	15	2.70		
92.3	70	15	2.2	1.35			11.5	686	121	15.7	2.70		
106.5	61	13	2.0	1.35			14.0	561	99	15.7	2.70		
125.9	51	11	1.9	1.35			2.8	1250	493	11.6	0		
153.9	42	9	1.9	1.35			3.6	1250	391	11.6	0		
197.9	33	7	1.8	1.35	4.4	1250	319	11.6	0				
153.9	42	9	0.8	0.85	B09/X1	4P	4.8	1250	289	11.6	0	B31 X53	4P
1.1kW			Frequency	Hz	50		5.5	1250	253	11.6	0		
			Number of poles	P	4	6	7.4	1060	187	11.6	115		
			Rotational speed n	r/min	1390	910	8.4	935	165	11.6	1.30		
0.18	8800	7569	52.9	0	B63 X95	4P	9.7	811	143	11.6	1.55	B20* X42*	4P
0.23	8800	6177	52.9	0			11.5	686	121	11.6	1.80		
0.27	8800	5133	52.9	0			14.0	561	99	11.6	2.20		
0.33	8800	4189	52.9	0			7.4	600	187	8.0	0		
0.40	8800	3481	52.9	0			8.4	600	165	8.0	0		
0.46	8800	3053	52.9	0			9.7	600	143	8.0	0		
0.55	8800	2537	52.9	0			11.5	600	121	8.0	0		
0.67	8800	2065	52.9	0			14.0	561	99	8.0	1.05		
0.75	8R0c	1849	52.9	0			16.0	592	87	11.6	1.80		
0.85	8800	1633	52.9	0			19.6	483	71	11.6	1.80		
0.92	8531	1505	52.9	1.00			23.6	401	59	10.8	2.50		
1.0	7692	1357	52.9	1.15			29.6	320	47	9.8	3.65		
1.1	6944	1225	52.9	1.25			32.3	292	43	9.6	3.65		
1.4	5685	1003	52.9	1.55			16.0	592	87	8.0	0.90		
1.7	4767	841	52.9	1.85			19.6	483	71	8.0	0.90		
1.9	4143	731	52.9	2.10	23.6	401	59	7.4	1.35				
2.1	3679	649	52.9	2.40	29.6	320	47	6.8	1.80				
2.3	3373	595	52.9	2.60	32.3	292	43	6.7	1.80				
2.8	2794	493	52.9	3.15	39.7	238	35	6.0	1.80				
0.67	5000	2065	33.1	0	B52 X84	4P	47.9	197	29	6.0	2.70	B2 X4	4P
0.75	5000	1849	33.1	0			60.4	156	23	5.0	3.65		
0.85	5000	1633	33.1	0			81.8	116	17	4.8	3.80		
0.92	5000	1505	33.1	0			92.7	102	15	4.7	4.30		
1.0	5000	1357	33.1	0			106.9	88	13	4.6	4.90		
1.1	5000	1225	33.1	0									

Notes:

- Models with * cannot be equipped with direct-connected motors;
- Models with "O" in the f_B column cannot use motors with 100% power. Please keep the load torque below "Ma" in the table during operation. Please install your own security device to protect the host;
- All models can be configured with 6P and 8P motors corresponding to the same motor base number;
- The allowable output torque and allowable radial force values of the three-stage transmission refer to the maximum values in the two-stage transmission.

Selection parameter table

Na	Ma	i	Fra	f _B	Machine model	Number of poles	Na	Ma	i	Fra	f _B	Machine model	Number of poles		
[r/min]	[Nm]		[kN]				[r/min]	[Nm]		[kN]					
1.1kW			Frequency	Hz	50		1.5kW			Frequency	Hz	50			
			Number of poles	P	4	6				Number of poles	P	4	6		
			Rotational speed n	r/min	1390	910				Rotational speed n	r/min	1390	920		
32.3	292	43	4.3	0.80	B1 X3	4P	9.7	1105	143	15.7	1.95	B41 X63	4P		
39.7	238	35	3.8	1.00			11.5	935	121	15.7	1.95				
47.9	197	29	3.8	1.20			14.0	765	99	15.7	1.95				
60.4	156	23	3.2	1.50			B0 X2	4P	4.4	1250	319	11.6	0	B31 X53	4P
81.8	116	17	3.0	1.80					4.8	1250	289	11.6	0		
92.7	102	15	2.9	1.80					5.5	1250	253	11.6	0		
106.9	88	13	2.8	1.80					7.4	1250	187	11.6	0		
126.4	75	11	2.6	2.70					8.4	1250	165	11.6	0		
154.4	61	9	2.6	2.70					9.7	1105	143	11.6	1.10		
198.6	48		2.5	2.70					11.5	935	121	11.6	1.30		
81.8	116	17	2.3	0.90	14.0	765			99	11.6	1.60				
92.7	102	15	2.2	0.90	16.0	807			87	11.6	1.35				
106.9	88	13	2.0	0.90	19.6	659			71	11.6	1.35				
126.4	75	11	1.9	0.90	23.6	547	59	10.8	1.85						
154.4	61	9	1.9	0.90	29.6	436	47	9.8	2.70						
198.6	48	7	1.8	0.90	32.3	399	43	9.6	2.70						
1.5kW			Frequency	Hz	50		39.7	325	35	8.5	3.60	B2 X4		4P	
			Number of poles	P	4	6	23.6	547	59	7.4	0.95				
			Rotational speed n	r/min	1390	920	29.6	436	47	6.8	1.35				
0.55	8800	2537	52.9	0	B63 X95	4P	32.3	399	43	6.7	1.35	B1 X3	4P		
0.67	8800	2065	52.9	0			39.7	325	35	6.0	1.35				
0.75	8800	1849	52.9	0			47.9	269	29	6.0	1.95				
0.85	8800	1633	52.9	0			60.4	213	23	5.0	2.70				
0.92	8800	1505	52.9	0			81.8	158	17	4.8	3.60				
1.0	8800	1357	52.9	0			92.7	139	15	4.7	3.60				
1.1	8800	1225	52.9	0			106.9	121	13	4.6	3.60				
1.4	7753	1003	52.9	1.10			126.4	102	11	4.1	3.60				
1.7	6500	841	52.9	1.35			154.4	83	9	4.0	3.60				
1.9	5650	731	52.9	1.55			198.6	65	7	3.8	3.60				
2.1	5016	649	52.9	1.75	47.9	269	29	3.8	0.85						
2.3	4599	595	52.9	1.90	60.4		23	3.2	1.10						
2.8	3811	493	52.9	2.30	81.8	158	17	3.0	1.35						
3.6	3022	391	52.9	2.90	92.7	139	15	2.9	1.35						
1.0	5000	1357	33.1	0	B52 X84	4P	106.9	121	13	2.8	1.35	B74 X106	4P		
1.1	5000	1225	33.1	0			126.4	102	11	2.6	1.95				
1.4	5000	1003	33.1	0			154.4	83	9	2.6	1.95				
1.7	5000	841	33.1	0			198.6	65	7	2.5	1.95				
1.9	5000	731	33.1	0			2.2kW			Frequency	Hz			50	
2.1	5016	649	33.1	1.00						Number of poles	P			4	6
2.3	4599	595	33.1	1.05						Rotational speed n	r/min			1410	935
2.8	3811	493	33.1	1.30			0.19	12000	7569	72.5	0				
3.6	3022	391	33.1	1.65			0.23	12000	6177	72.5	0				
4.4	2466	319	33.1	2.00			0.27	12000	513	72.5	0				
4.8	2234	289	33.1	2.25	0.34	12000	4189	72.5	0						
5.5	1956	253	33.1	2.55	0.41	12000	3481	72.5	0						
7.4	1445	187	33.1	3.45	0.46	12000	3053	72.5	0						
2.3	2500	595	15.7	0	0.56	12000	2537	72.5	0						
2.8	2500	493	15.7	0	0.68	12000	2065	72.5	0						
3.6	2500	391	15.7	0	0.76	12000	1849	72.5	0						
4.4	2466	319	15.7	1.00	0.86	12000	1633	72.5	0						
4.8	2234	289	15.7	1.10	0.94	12000	1505	72.5	0						
5.5	1956	253	15.7	1.25	1.0	12000	1357	72.5	0						
7.1	1507	195	15.7	1.65	1.2	12000	1225	72.5	0						
7.4	1445	187	15.7	1.70	1.4	11209	1003	72.5	1.05						
8.4	1275	165	15.7	1.95	1.7	9399	841	72.5	1.25						

Notes:

- Models with * cannot be equipped with direct-connected motors;
- Models with "O" in the f_B column cannot use motors with 100% power. Please keep the load torque below "Ma" in the table during operation. Please install your own security device to protect the host;
- All models can be configured with 6P and 8P motors corresponding to the same motor base number;
- The allowable output torque and allowable radial force values of the three-stage transmission refer to the maximum values in the two-stage transmission.

Selection parameter table

Na [r/min]	Ma [Nm]	i	Fra	f _B	Machine model	Number of poles	Na [r/min]	Ma [Nm]	i	Fra	f _B	Machine model	Number of poles
			[kN]							[kN]			
2.2kW		731	Frequency	Hz	50		2.2kW		47	Frequency	Hz	50	
			Number of poles	P	4	6				Number of poles	P	4	6
			Rotational speed n	r/min	1410	935				Rotational speed n	r/min	1410	935
1.9	8169	731	72.5	1.45	B74 X106	4P	30.0	630	47	13.2	3.35	B4/X6/X7	4P
2.2	7253	649	72.5	1.65			32.8	577	43	13.0	3.35		
2.4	6649	595	72.5	1.80			16.2	1167	87	11.6	0.90		
2.9	5510	493	72.5	2.20			19.9	952	71	11.6	0.90		
0.76	8800	1849	52.9	0	B63 X95	4P	23.9	791	59	10.8	1.25	B3 X5	4P
0.86	8800	1632	52.9	0			30.0	630	47	9.8	1.80		
0.94	3800	1505	52.9	0			32.8	577	43	9.6	1.80		
1.0	8800	1357	52.9	0			40.3	469	35	8.5	2.45		
1.2	8800	1225	52.9	0			48.6	389	29	8.5	3.00		
1.4	8800	1003	52.9	0			61.3	308	23	7.3	3.35		
1.7	8800	841	52.9	0			74.2	255	19	7.2	4.40		
1.9	8169	731	52.9	1.05			30.0	630	47	6.8	0.90		
2.2	7253	649	52.9	1.20			32.8	577	43	6.7	0.90		
2.4	6649	595	52.9	1.30			40.3	469	35	6.0	0.90		
2.9	5510	493	52.9	1.60	48.6	389	29	6.0	1.35				
3.6	4370	391	52.9	2.00	61.3	308	23	5.0	1.80				
4.4	3565	319	52.9	2.50	82.9	228	17	4.8	2.45				
4.9	3230	289	52.9	2.75	94.0	201	15	4.7	2.45				
5.6	2827	253	52.9	3.15	108.5	174	13	4.6	2.45				
1.4	5000	1003	33.1	0	B52 X84	4P	128.2	148	11	4.1	2.45	B2 X4	4P
1.7	5000	841	33.1	0			156.7	121	9	4.0	2.45		
1.9	5000	731	33.1	0			201.4	94	7	3.8	2.45		
2.2	5000	649	33.1	0			82.9	228	17	3.0	0.90		
2.4	5000	595	33.1	0			94.0	201	15	2.9	0.90		
2.9	5000	493	33.1	0			108.5	174	13	2.8	0.90		
3.6	4370	391	33.1	1.15			128.2	148	11	2.6	1.35		
4.4	3565	319	33.1	1.40			156.7	121	9	2.6	1.35		
4.9	3230	289	33.1	1.55			201.4	94	7	2.5	1.35		
5.6	2827	253	33.1	1.75			3kW		Frequency	Hz	50		
7.5	2090	187	33.1	2.40	Number of poles	P			4	6			
8.5	1844	165	33.1	2.45	Rotational speed n	r/min			1410	965			
9.9	1598	143	33.1	2.45	0.19	21500	7569	91.7	0	B42 X74 X64	4P	B84 X117	4P
11.7	1352	121	33.1	2.45	0.23	21500	6177	91.7	0				
14.2	1106	99	33.1	2.45	0.27	21500	5133	91.7	0				
8.5	1844	165	15.7	1.35	0.34	21500	4189	91.7	0				
9.9	1598	143	15.7	1.55	0.41	21500	3481	91.7	0				
11.7	1352	121	15.7	1.85	0.46	21500	3053	91	0				
14.2	1106	99	15.7	2.25	0.56	21500	2537	91.7	0				
3.6	2500	391	15.7	0	0.68	21500	2065	91.7	0				
4.4	2500	319	15.7	0	0.76	21500	1840	91.7	0				
4.9	2500	289	15.7	0	0.86	21500	1633	91.7	0				
5.6	2500	253	15.7	0	0.94	21500	1505	91.7	0				
7.5	2090	187	15.7	1.20	1.0	20680	1357	91.7	1.05	B41* X63*	4P	B74 X106	4P
8.5	1844	165	15.7	1.35	1.2	18668	1225	91.7	1.15				
9.9	1598	143	15.7	1.35	1.4	15285	1003	91.7	1.40				
11.7	1352	121	15.7	1.35	1.7	12816	841	91.7	1.70				
14.2	1106	99	15.7	1.35	1.9	11140	731	91.7	1.95				
7.5	1250	187	11.6	0	2.2	9890	649	91.7	2.20				
8.5	1250	165	11.6	0	2.4	9067	595	91.7	2.40				
9.9	1250	143	11.6	0	2.9	7513	493	91.7	2.90				
11.7	1250	121	11.6	0	0.19	12000	7569	72.5	0				
14.2	1106	99	11.6	1.15	0.23	12000	6177	72.5	0				
16.2	1167	87	15.7	1.80	0.27	12000	5133	72.5	0				
19.9	952	71	15.7	1.80	0.34	12000	4189	72.5	0				
23.9	791	59	14.5	2.45	0.41	12000	3481	72.5	0				

Notes:

- Models with * cannot be equipped with direct-connected motors;
- Models with "O" in the f_B column cannot use motors with 100% power. Please keep the load torque below "Ma" in the table during operation. Please install your own security device to protect the host;
- All models can be configured with 6P and 8P motors corresponding to the same motor base number;
- The allowable output torque and allowable radial force values of the three-stage transmission refer to the maximum values in the two-stage transmission.

Selection parameter table

Na	Ma	i	Fra	f _B	Machine model	Number of poles	Na	Ma	i	Fra	f _B	Machine model	Number of poles		
[r/min]	[Nm]		[kN]	Hz			[r/min]	[Nm]		[kN]	Hz				
3kW			Frequency	Hz	50		3kW			Frequency	Hz	50			
			Number of poles	P	4	6				Number of poles	P	4	6		
			Rotational speed n	r/min	1410	965				Rotational speed n	r/min	1410	965		
0.46	12000	3053	72.5	0	B74 X106	4P	16.2	1591	87	33.1	2.45	B5* X8*	4P		
0.56	12000	2537	72.5	0			19.9	1298	/1	30.2	3.10				
0.68	12000	2065	72.5	0			23.9	1079	59	28.1	3.35				
0.76	12000	1849	72.5	0			16.2	1591	87	15.7	1.35	B4 X6 X7	4P		
0.86	12000	1633	72.5	0			19.9	1298		15.7	1.35				
0.94	12000	1505	72.5	0			23.9	1079	59	14.5	1.80				
1.0	12000	1357	72.5	0			30.0	860	47	13.2	2.45				
1.2	12000	1225	72.5	0			32.8	786	43	13.0	2.45				
1.4	12000	1003	72.5	0			40.3	640	35	11.5	3.35	B3 X5	4P		
1.7	12000	841	72.5	0			48.6	530	29	11.5	3.35				
1.9	11140	731	72.5	1.05			23.9	1079	59	10.8	0.90				
2.2	9890	649	72.5	1.20			30.0	860	47	9.8	1.35				
2.4	9067	595	72.5	1.30			32.8	/86	43	9.6	1.35				
2.9	7513	493	72.5	1.60			40.3	640	35	8.5	1.80	B2 X4	4P		
3.6	5959	391	72.5	2.00			48.6	530	29	8.5	2.00				
4.4	4861	319	72.5	2.50			61.3	421	23	7.3	2.45				
4.9	4404	289	72.5	2.75			74.2	347	19	7.2	3.25				
1.2	8800	1225	52.9	0			82.9	31	17	6.7	3.25				
1.4	8800	1003	52.9	0			94.0	274	15	6.5	3.25	B1* X3*	4P		
1.7	8800	841	52.9	0	108.5	238	13	6.2	3.35						
1.9	8800	731	52.9	0	128.2	201	11	5.9	3.35						
2.2	8800	649	52.9	0	156.7	165	9	5.5	3.35						
2.4	8800	595	52.9	0	48.6	530	29	6.0	095						
2.9	7513	493	52.9	1.15	61.3	421	23	5.0	1.35	B1* X3*	4P				
3.6	5959	391	52.9	1.45	82.9	311	17	4.8	1.80						
4.4	4861	319	52.9	1.80	94.0	274	15	4.7	1.80						
4.9	4404	289	52.9	2.00	108.5	238	13	4.6	1.80						
5.6	3856	253	52.9	2.30	128.2	201	11	4.1	1.80						
7.5	2850	187	52.9	3.10	156.7	165	9	4.0	1.80	B1* X3*	4P				
8.5	2514	165	52.9	3.35	201.4	128	7	3.8	1.80						
9.9	2179	143	52.9	3.35	128.2	201	11	2.6	0.95						
11.7	1844	121	52.9	3.35	156.7	165	9	2.6	0.95						
14.2	1509	99	52.9	3.35	201.4	128	7	2.5	0.95						
8.5	2514	165	33.1	2.00	B53 X85	4P	4kW		Frequency	Hz	50				
9.9	2179	143	33.1	2.30					Number of poles	P	4	6			
11.7	1844	121	33.1	2.75					Rotational speed n	r/min	1435	965			
14.2	1509	99	33.1	3.35	B52 X84	4P	0.19	21500	7569	91.7	0	B84 X117	4P		
2.4	5000	595	33.1	0			0.23	21500	6177	91.7	0				
2.9	5000	493	33.1	0			0.28	21500	5133	91.7	0				
3.6	5000	391	33.1	0			0.34	21500	4189	91.7	0				
4.4	4861	319	33.1	1.00			0.41	21500	3481	91.7	0				
4.9	4404	289	33.1	1.15			0.47	21500	3053	91.7	0				
5.6	3856	253	33.1	1.30			0.57	21500	2537	91.7	0				
7.5	2850	187	33.1	1.75			0.69	21500	2065	91.7	0				
8.5	2514	165	33.1	1.80			0.78	21500	1849	91.7	0				
9.9	2170	143	33.1	1.80			0.88	21500	1633	91.7	0				
11.7	1844	121	33.1	1.80			1.0	21500	1505	91.7	0				
14.2	1509	99	33.1	1.80			1.1	21500	1357	91.7	0				
4.4	2500	319	15	0			1.2	21500	1225	91.7	0			B42 X64 X74	4P
4.9	2500	289	15.7	0			1.4	20025	1003	91.7	1.05				
5.6	2500	253	15.7	0			1.7	16791	841	91.7	1.25				
7.5	2500	187	15.7	0	2.0	14595	731	91.7	1.45						
8.5	2514	165	15	1.00	2.2	12957	649	91.7	1.65						
9.9	2179	143	15.7	1.15	2.4	11879	595	91.7	1.80						
11.7	1844	121	15.7	1.35	2.9	9843	493	91.7	2.15						
14.2	1509	99	15.7	1.65	3.7	7806	391	91.7	2.75						

Notes:

- Models with * cannot be equipped with direct-connected motors;
- Models with "O" in the f_B column cannot use motors with 100% power. Please keep the load torque below "Ma" in the table during operation. Please install your own security device to protect the host;
- All models can be configured with 6P and 8P motors corresponding to the same motor base number;
- The allowable output torque and allowable radial force values of the three-stage transmission refer to the maximum values in the two-stage transmission

Selection parameter table

Na	Ma	i	Fra	f _B	Machine model	Number of poles	Na	Ma	i	Fra	f _B	Machine model	Number of poles
[r/min]	[Nm]		[kN]				[r/min]	[Nm]		[kN]			
4kW			Frequency	Hz	50		4kW			Frequency	Hz	50	
			Number of poles	P	4	6				Number of poles	P	4	6
			Rotational speed n	r/min	1435	965				Rotational speed n	r/min	1435	965
4.5	6369	319	91.7	3.35	B84 X117	4P	16.5	2084	87	33.1	1.85	B5* X8*	4P
5.0	5770	289	91.7	3.70			20.2	1701	71	30.2	2.30		
5.7	5051	253	91.7	3.70			24.3	1414	59	28.1	2.50		
7.7	3733	187	91.7	3.70			30.5	1126	47	27.0	3.70		
1.1	12000	1357	72.5	0	B74 X106	4P	334	1030	43	26.4	3.70	B4 X6 X7	4P
1.2	12000	1225	72.5	0			16.5	2084	87	15.7	1.00		
1.4	12000	1003	72.5	0			20.2	1701	71	15.7	1.00		
1.7	12000	841	72.5	0			24.3	1414	59	14.5	1.35		
2.0	12000	731	72.5	0			30.5	1126	47	13.2	1.85		
2.2	12000	649	72.5	0			33.4	1030	43	13.0	1.85		
2.4	11879	595	72.5	1.00			41.0	839	35	11.5	2.50		
2.9	9843	493	72.5	1.20			49.5	695	29	11.5	2.50		
3.7	7806	391	72.5	1.50			62.4	551	23	9.8	3.70		
4.5	6369	319	72.5	1.85			30.5	1126	47	9.8	1.00		
5.0	5770	289	72.5	2.05	33.4	1030	43	9.6	1.00				
5.7	5051	253	72.5	2.35	41.0	839	35	8.5	1.35				
7.7	3733	187	72.5	3.20	49.5	695	29	8.5	1.65				
8.4	3294	165	72.5	3.50	62.4	551	23	7.3	1.85				
11.4	2416	121	72.5	3.70	75.5	455	19	7.2	2.40				
13.9	1977	99	72.5	3.70	84.4	407	17	6.7	2.40				
1.7	8800	841	52.9	0	B63 X95	4P	95.7	359	15	6.5	2.40	B3 X5	4P
2.0	8800	731	52.9	0			110.4	311	13	6.2	2.50		
2.2	8800	649	52.9	0			130.5	264	11	5.9	2.50		
2.4	8800	595	52.9	0			159.4	216	9	5.5	2.50		
2.9	8800	493	52.9	0			62.4	551	23	5.0	1.00		
3.7	7806	391	52.9	1.10			84.4	407	17	4.8	1.35		
4.5	6369	319	52.9	1.35			95.7	359	15	4.7	1.35		
5.0	5770	289	52.9	1.50			110.4	311	13	4.6	1.35		
5.7	5051	253	52.9	1.70			130.5	264	11	4.1	1.35		
7.7	3733	187	52.9	2.35			159.4	216	9	4.0	1.35		
8.7	3294	165	52.9	2.50	205.0	168	7	3.8	1.35				
10.0	2855	143	52.9	2.50	5.5kW		Frequency	Hz	50		B2 X4	4P	
11.9	2416	121	52.9	2.50			Number of poles	P	4	6			
14.5	1977	99	52.9	2.50			Rotational speed n	r/min	1445	965			
7.7	3733	187	33.1	1.30	B53 X85	4P	0.19	29400	7569	158.4	0	B95 X128	4P
8.7	3294	165	33.1	1.50			0.23	29400	6177	158.4	0		
10.0	2855	143	33.1	1.75			0.28	29400	5133	158.4	0		
11.9	2416	121	33.1	2.05			0.34	29400	4189	158.4	0		
14.5	1977	99	33.1	2.50			0.42	29400	3481	158.4	0		
2.9	5000	493	33.1	0	B52 X84	4P	0.47	29400	3053	158.4	0	B95 X128	4P
3.7	5000	391	33.1	0			0.57	29400	2537	158.4	0		
4.5	5000	319	33.1	0			0.70	29400	2065	158.4	0		
5.0	5000	289	33.1	0			0.78	29400	1849	158.4	0		
5.7	5000	253	33.1	0			0.88	29400	1633	158.4	0		
7.7	3733	187	33.1	1.30			0.96	29400	1505	158.4	0		
8.7	3294	165	33.1	1.35			1.1	29400	1357	158.4	0		
10.0	2855	143	33.1	1.35			1.2	29400	1225	158.4	0		
11.9	2416	121	33.1	1.35			1.4	27344	1003	158.4	1.05		
14.5	1977	99	33.1	1.35			1.7	22927	841	158.4	1.25		
7.7	2500	187	15.7	0	B42	4P	2.0	19929	731	158.4	1.45	X64	4P
8.7	2500	165	15.7	0			2.2	17693	649	158.4	1.65		
10.0	2500	143	15.7	0			2.4	16221	595	158.4	1.80		
11.9	2416	121	15.7	1.00			2.9	13440	493	158.4	2.15		
14.5	1977	99	15.7	1.25			3.7	10659	391	158.4	2.70		
					X74								

Notes:

1. Models with * cannot be equipped with direct-connected motors;
2. Models with "O" in the f_B column cannot use motors with 100% power. Please keep the load torque below "Ma" in the table during operation. Please install your own security device to protect the host;
3. All models can be configured with 6P and 8P motors corresponding to the same motor base number;
4. The allowable output torque and allowable radial force values of the three-stage transmission refer to the maximum values in the two-stage transmission.

Selection parameter table

Na	Ma	i	Fra	f _B	Machine model	Number of poles	Na	Ma	i	Fra	f _B	Machine model	Number of poles
[r/min]	[Nm]		[kN]				[r/min]	[Nm]		[kN]			
5.5kW			Frequency	Hz	50		5.5kW			Frequency	Hz	50	
			Number of poles	p	4	6				Number of poles	p	4	6
			Rotational speed n	r/min	1445	965				Rotational speed n	r/min	1445	965
0.70	21500	2065	91.7	0	B84 X117	4P	11.1	4262	87	52.9	1.75	B6* X9*	6P
0.78	21500	1849	91.7	0			13.6	3478	71	52.9	1.75		
0.88	21500	1633	91.7	0			16.4	2890	59	49.6	1.80		
1.0	21500	1505	91.7	0			20.5	2302	47	49.6	2.70		
1.1	21500	1357	91.7	0			224	2106	43	49.6	2.70		
1.2	21500	1225	91.7	0			16.6	2846	87	33.1	1.35		
1.4	21500	1003	91.7	0			20.4	2323	71	30.2	1.70	B5 X8	4P
1.7	21500	841	91.7	0			24.5	1930	59	28.1	1.80		
2.0	19929	131	91.7	1.05			30.7	1538	47	27.0	2.70		
2.2	17693	649	91.7	1.20			33.6	1401	43	26.4	2.70		
2.4	16221	595	91.7	1.30			41.3	1145	35	26.4	3.40		
2.9	13440	493	91.7	1.55			49.8	949	29	25.2	3.65		
3.7	10659	391	91.7	2.00			24.5	1930	59	14.5	0.95	B4 X6 X7	4P
4.5	8697	319	91.7	2.45			30.7	1538	47	13.2	1.35		
5.0	7879	289	91.7	2.70			33.6	1407	43	13.0	1.35		
5.7	6897	253	91.7	2.70			41.3	1145	35	11.5	1.80		
7.7	5098	187	91.7	2.70			49.8	949	29	11.5	1.80		
1.4	12000	1003	72.5	0			62.8	752	23	9.8	2.70		
1.7	12000	841	72.5	0	76.1	622	19	9.4	2.70				
2.0	12000	731	72.5	0	85.0	556	17	9.1	2.70				
2.2	12000	649	72.5	0	96.3	491	15	8.8	2.70				
2.4	12000	595	72.5	0	111.2	425	13	8.4	2.70				
2.9	12000	493	72.5	0	131.4	360	11	8.0	2.70				
3.7	10659	391	72.5	1.10	160.6	294	9	6.6	2.70				
4.5	8697	319	72.5	1.35	41.3	1145	35	8.5	0.95				
5.0	7879	289	72.5	1.50	49.8	949	29	8.5	1.20				
5.7	6897	253	72.5	1.70	62.8	752	23	7.3	1.35				
7.7	5098	187	72.5	2.30	76.1	622	19	7.2	1.75				
8.4	440g	165	72.5	2.55	85.0	556	17	6.7	1.75				
11.4	320c	121	72.5	2.70	96.3	491	15	6.5	1.75				
13.9	2699	99	72.5	2.70	111.2	425	13	6.2	1.80				
8.8	4400	165	52.9	1.95	131.4	360	11	5.9	1.80				
10.1	3800	143	52.9	2.20	160.6	294	9	5.5	1.80				
11.9	3299	121	52.9	2.65	85.0	556	17	4.8	0.95				
14.6	2699	99	52.9	2.70	96.3	491	15	4.7	0.95				
2.4	8800	595	52.9	0	111.2	425	13	4.6	0.95				
2.9	8800	493	52.9	0	131.4	360	11	4.1	0.95				
3.7	8800	391	52.9	0	160.6	294	9	4.0	0.95				
4.5	8697	319	52.9	1.00	206.4	229	7	3.8	0.95				
5.0	7879	289	52.9	1.10				Frequency	50				
5.7	6897	253	52.9	1.25				Number of poles	p	4	6		
7.7	5098	187	52.9	1.70				Rotational speed n	r/min	1445	970		
8.8	4498	165	52.9	1.80	010	29400	7569	158.4	0	B95 X128	4P		
10.1	3898	143	52.9	1.80	0.23	29400	6177	158.4	0				
11.9	3299	121	52.9	1.80	0.28	29400	5133	158.4	0				
14.6	2699	99	52.9	1.80	0.34	29400	4189	158.4	0				
4.5	5000	319	33.1	0	0.42	29400	3481	158.4	0				
5.0	5000	289	33.1	0	0.47	29400	3053	158.4	0				
5.7	5000	253	33.1	0	0.57	29400	2537	158.4	0				
7.7	5000	187	33.1	0	0.70	29400	2065	158.4	0				
8.8	4498	165	33.1	1.10	0.78	29400	1849	158.4	0				
10.1	3898	143	33.1	1.25	0.88	29400	1633	158.4	0				
11.9	3299	121	33.1	1.50	0.96	29400	1505	158.4	0				
14.6	2699	99	33.1	1.80	1.1	29400	1357	158.4	0				

Notes:

- Models with * cannot be equipped with direct-connected motors;
- Models with "O" in the f_B column cannot use motors with 100% power. Please keep the load torque below "Ma" in the table during operation. Please install your own security device to protect the host;
- All models can be configured with 6P and 8P motors corresponding to the same motor base number;
- The allowable output torque and allowable radial force values of the three-stage transmission refer to the maximum values in the two-stage transmission.

Selection parameter table

Na	Ma	i	Fra	f _B	Machine model	Number of poles	Na	Ma	i	Fra	f _B	Machine model	Number of poles				
[r/min]	[Nm]		[kN]				[r/min]	[Nm]		[kN]							
7.5kW			Frequency	Hz	50		7.5kW			Frequency	Hz	50					
			Number of poles	P	4	6				Number of poles	P	4	6				
			Rotational speed n	r/min	1445	970				Rotational speed n	r/min	1445	970				
1.2	29400	1225	158.4	0	B95 X128	4P	5.7	5000	253	33.1	0	B53 X85	4P				
1.4	29400	1003	158.4	0			7.7	5000	187	33.1	0						
1.7	29400	841	158.4	0			8.8	5000	165	33.1	0						
2.0	27175	731	158.4	1.05			10.1	5000	143	33.1	0						
2.2	24127	649	158.4	1.20			11.9	4498	121	33.1	1.10						
2.4	22119	595	158.4	1.30			14.6	3680	99	33.1	1.35						
2.9	18328	493	158.4	1.55			11.1	5782	87	72.5	1.65	B7* X10*	6P				
3.7	14536	391	158.4	2.00			13.7	4718	71	72.5	2.30						
4.5	11859	319	158.4	2.45			16.4	3921	59	66.5	2.80						
5.7	9405	253	91.7	2.25			20.6	3123	47	63.4	3.20						
7.7	6952	187	91.7	3.05	B85 X118	4P	22.6	2858	43	62.2	3.80						
1.1	21500	1357	91.7	0			27.7	2326	35	58.9	3.80						
1.2	21500	1225	91.7	0	B84 X117	4P	11.1	5782	87	52.9	1.30	B6* X9*	6P				
1.4	21500	1003	91.7	0			13.7	4718	71	52.9	1.30						
1.7	21500	841	91.7	0			16.4	3921	59	49.6	1.35						
2.0	21500	731	91.7	0			20.6	3123	47	49.6	1.95						
2.2	21500	649	91.7	0			22.6	2858	43	49.6	1.95						
2.4	21500	595	91.7	0			27.7	2326	35	46.9	2.70						
2.9	18328	493	91.7	1.15			33.4	1927	29	44.8	3.20	B5 X8	4P				
3.7	14536	391	91.7	1.45			16.6	3881	87	33.1	0.95						
4.5	11859	319	91.7	1.80			20.4	3167	71	30.2	1.25						
5.0	10744	289	91.7	1.95			24.5	2632	59	28.1	1.35						
5.7	9405	253	91.7	1.95			30.7	2097	47	27.0	1.95						
7.7	6952	187	91.7	1.95			33.6	1918	43	26.4	1.95						
11.4	4498	121	91.7	1.95			41.3	1561	35	26.4	2.50						
13.9	3680	99	91.7	1.95			49.8	1294	29	25.2	2.70						
2.2	12000	649	72.5	0			B74 X106	4P	62.8	1026	23			22.2	3.30	B4 X6 X7	4P
2.4	12000	595	72.5	0					76.1	848	19			21.6	3.30		
2.9	12000	493	72.5	0	85.0	758			17	20.9	3.30						
3.7	12000	391	72.5	0	96.3	669			15	19.2	3.30						
4.5	11859	319	72.5	1.00	111.2	580			13	16.8	3.30						
5.0	10744	289	72.5	1.10	131.4	491			11	15.4	3.30						
5.7	9405	253	72.5	1.25	30.7	2097			47	13.2	0.95						
7.7	6952	187	72.5	1.70	33.6	1918			43	13.0	0.95						
8.4	6134	165	72.5	1.85	41.3	1561			35	11.5	1.35						
11.4	4498	121	72.5	1.95	49.8	1294			29	11.5	1.35						
13.9	3680	99	72.5	1.95	62.8	1026			23	9.8	1.95						
8.8	6134	165	52.9	1.40	B64 X96	4P			76.1	848	19	9.4	1.95				
10.1	5316	143	52.9	1.65					85.0	758	17	9.1	1.95				
11.9	4498	121	52.9	1.95					96.3	669	15	8.8	1.95				
14.6	3680	99	52.9	1.95			111.2	580	13	8.4	1.95						
3.7	8800	391	52.9	0			131.4	491	11	8.0	1.95						
4.5	8800	319	52.9	0			160.6	401	9	6.6	1.95						
5.0	8800	289	52.9	0	B63 X95	4P	49.8	1294	29	8.5	0.85	B3 X5	4P				
5.7	8800	253	52.9	0			62.8	1026	23	7.3	0.95						
7.7	6952	187	52.9	1.25			76.1	848	19	7.2	1.30						
8.8	6134	165	52.9	1.35			85.0	758	17	6.7	1.30						
10.1	5316	143	52.9	1.35			96.3	669	15	6.5	1.30						
11.9	4498	121	52.9	1.35			111.2	580	13	6.2	1.35						
14.6	3680	99	52.9	1.35			131.4	491	11	5.9	1.35						
							160.6	401	9	5.5	1.35						

Notes:

- Models with * cannot be equipped with direct-connected motors;
- Models with "O" in the f_B column cannot use motors with 100% power. Please keep the load torque below "Ma" in the table during operation. Please install your own security device to protect the host;
- All models can be configured with 6P and 8P motors corresponding to the same motor base number;
- The allowable output torque and allowable radial force values of the three-stage transmission refer to the maximum values in the two-stage transmission.

Selection parameter table

Na	Ma	i	Fra	f _B	Machine model	Number of poles	Na	Ma	i	Fra	f _B	Machine model	Number of poles	
[r/min]	[Nm]		[kN]				[r/min]	[Nm]		[kN]				
11kW			Frequency	Hz	50		11kW			Frequency	Hz	50		
			Number of poles	P	4	6				Number of poles	P	4	6	
			Rotational speed n	r/min	1460	970				Rotational speed n	r/min	1460	970	
1.0	29400	1505	158.4	0	B95 X128	4P	22.6	4191	43	49.6	1.35	B6* X9*	6P	
1.1	29400	1357	158.4	0			27.7	3411	35	46.9	1.80			
1.2	29400	1225	158.4	0			33	2827	29	44.8	2.15			
1.5	29400	1003	158.4	0			42.2	2242	23	40.2	2.70			
1.7	29400	841	158.4	0			51.1	1852	19	37.2	2.70			
2.0	2940	731	158.4	0			57.1	1657	17	34.9	2.70			
2.2	29400	649	158.4	0			64.7	1462	15	34.2	2.70			
2.5	29400	595	158.4	0			74.6	1267	13	33.4	2.70			
3.0	26604	493	158	1.10			88.2	1072	11	32.6	2.70			
3.7	21100	391	158.4	1.35			20.6	4598	71	30.2	0.85			
4.6	17215	319	158.4	1.70	31.1	3044	47	27.0	1.35					
5.8	13653	253	158.4	2.15	34.0	2785	43	26.4	1.35					
5.1	15596	289	91.7	1.35	B85 X118	4P	41.7	2266	35	26.4	1.70	B5 X8	4P	
5.8	13653	253	91.7	1.55			50.3	1878	29	25	1.80			
7.8	10091	187	91.7	2.10			63.5	1489	23	22.2	2.25			
11.5	6826	121	91.7	2.25	B84 X117	4P	76.8	1230	19	21.6	2.25	B4 X6 X7	4P	
1.7	21500	841	91.7	0			85.9	1101	17	20.9	2.25			
2.0	21500	731	91.7	0			97.3	971	15	19.2	2.25			
2.2	21500	649	91.7	0			112.3	842	13	16.8	22			
2.5	21500	595	91	0			132.7	712	11	15.4	2.25			
3.0	21500	493	91.7	0			41.7	2266	35	11.5	0.90			
3.7	21100	391	91.7	1.00			50.3	1878	29	11.5	0.90			
4.6	17215	319	91.7	1.20			63.5	1489	23	9.8	1.35			
5.1	15596	289	91.7	1.35			76.8	1230	19	9.4	1.35			
5.8	13653	253	91.7	1.35			85.9	1101	17	9.1	1.35			
7.8	10091	187	91.7	1.35	97.3	971	15	8.8	1.35					
11.5	6826	121	91.7	1.35	112.3	842	13	8.4	1.35					
14.1	5585	99	91.7	1.35	B74 X106	4P	132.7	712	11	8.0	1.35	B3* X5*	4P	
3.7	12000	391	72.5	0			162.2	583	9	6.6	1.35			
4.6	12000	319	72.5	0			85.9	1101	17	6.7	0.85			
5.1	12000	289	72.5	0			97.3	971	15	6.5	0.85			
5.8	12000	253	72.5	0			112.3	842	13	6.2	0.90			
7.8	10091	187	72.5	1.15			132.7	712	11	5.9	0.90			
8.6	9201	165	72.5	1.30			162.2	583	9	5.5	0.90			
11.5	6826	121	72.5	1.35			15kW		Frequency	Hz	50			
14.1	5585	99	72.5	1.35					Number of poles	P	4			6
4.6	8800	319	52.9	0					Rotational speed n	r/min	1460			970
5.1	8800	289	52.9	0	B64 X96	4P	1.7	29400	841	158.4	0	B95 X128	4P	
5.8	8800	253	52.9	0			2.0	29400	731	158.4	0			
7.8	8800	187	52.9	0			2.2	29400	649	158.4	0			
8.8	8800	165	52.9	0			2.5	29400	595	158.4	0			
10.2	7717	143	52.9	1.10			3.0	29400	493	158.4	0			
12.1	6530	121	52.9	1.30			3.7	28773	391	158.4	1.00			
14.7	5342	99	52.9	1.35			4.6	23474	319	158.4	1.25			
11.1	8480	87	72.5	1.15			5.8	18618	253	158.4	1.55			
13.7	6920	71	72.5	1.55			2.5	21500	595	91.7	0			
16.4	5751	59	66.5	1.90			3.0	21500	493	91.7	0			
20.6	4581	47	63.4	2.25	3.7	21500	391	91.7	0					
22.6	4191	43	62.2	2.60	4.6	21500	319	91.7	0					
27.7	3411	35	58.9	2.60	B7* X10*	6P	5.1	21267	289	91.7	1.00	B85 X118	4P	
11.1	8480	87	52.9	0.85			5.8	18618	253	91.7	1.15			
13.7	6920	71	52.9	0.85			7.8	13761	187	91.7	1.55			
16.4	5751	59	49.6	0.90			11.5	930c	121	91.7	1.65			
20.6	4581	47	49.6	1.35			15kW		Frequency	Hz	50			
11kW			Number of poles	P	4	6			Number of poles	P	4	6		
			Rotational speed n	r/min	1460	970			Rotational speed n	r/min	1460	970		

Notes:

- Models with * cannot be equipped with direct-connected motors;
- Models with "O" in the f_B column cannot use motors with 100% power. Please keep the load torque below "Ma" in the table during operation. Please install your own security device to protect the host;
- All models can be configured with 6P and 8P motors corresponding to the same motor base number;
- The allowable output torque and allowable radial force values of the three-stage transmission refer to the maximum values in the two-stage transmission.

摆线针轮减速机

Selection parameter table

Na	Ma	i	Fra	f _B	Machine model	Number of poles	Na	Ma	i	Fra	f _B	Machine model	Number of poles				
[r/min]	[Nm]		[kN]				[r/min]	[Nm]		[kN]							
15kW			Frequency	Hz	50		18.5kW			Frequency	Hz	50					
			Number of poles	P	4	6				Number of poles	P	4	6				
			Rotational speed n	r/min	1460	970				Rotational speed n	r/min	1470	980				
11.1	11563	87	72.5	0.80	B7* X10*	6P	11.1	14261	87	91.7	1.30	B8* X11*	6P				
13.7	9437		72.5	1.15			13.7	11639		91.7	1.65						
16.4	7842	59	66.5	1.40			16.4	9672	59	84.1	2.00						
20.6	6247	47	63.4	1.65			22.6	7049	43	78.7	2.70						
22.6	5715	43	62.2	1.90			27.7	5737	35	74.5	3.25						
27.7	4652	35	58.9	1.90			13.7	11639	7	72.5	0.90	B7* X10*	6P				
33.4	3854	29	56.2	2.60			16.4	9672	59	66.5	1.15						
42.2	3057	23	47.8	3.20			20.6	7704	47	63.4	1.35						
57.1	2260	17	47.8	3.20			22.6	7049	43	62.2	1.50						
62.6	2060	15	44.4	3.20			27.7	5737	35	58.9	1.50						
84.3	1528	1	40.9	3.20	33.4	4754	29	56.2	2.10								
20.6	6247	47	49.6	0.95	42.2	3770	23	47.8	2.60	B6* X9*	6P						
22.6	5715	43	49.6	0.95	57.1	2787	17	47.8	2.60								
27.7	4652	35	46.9	1.35	62.6	2541	15	44.4	2.60								
33.4	3854	29	44.8	1.60	84.3	1885	11	40.9	2.60								
42.2	3057	23	40.2	1.95	22.6	7049	43	49.6	0.80								
51.1	2525	19	37.2	1.95	27.7	5737	35	46.9	1.05								
57.1	2260	17	34.9	1.95	33.4	4754	29	44.8	1.30								
64.7	1994	15	34.2	1.95	42.2	3770	23	40.2	1.60								
74.6	1728	13	33.4	1.95	51.1	3115	19	37.2	1.60								
88.2	1462	11	32.6	1.95	57.1	2787	17	34.9	1.60								
31.1	4150	47	27.0	0.95	64.7	2459	15	34.2	1.60	B6* X9*	6P						
34.0	3797	43	26.4	0.95	74.6	2131	13	33.4	1.60								
41.7	3091	35	26.4	1.25	88.2	1803	11	32.6	1.60								
50.3	2561	29	25.2	1.35	42.0	3786	35	26.4	1.00								
63.5	2031	23	22.2	1.65	50.7	3137	29	25.2	1.00								
76.8	1678	19	21.6	1.65	63.9	2488	23	22.2	1.35								
85.9	1501	17	20.9	1.65	77.4	2055	19	21.6	1.35								
97.3	1325	15	19.2	1.65	86.5	1839	17	20.9	1.35								
112.3	1148	13	16.8	1.65	98.0	1623	15	19.2	1.35								
132.7	971	11	15.4	1.65	113.1	1406	13	16.8	1.35								
63.5	2031	23	9.8	0.95	133.6	1190	11	15.4	1.35	B5* X8*	4P						
76.8	1678	19	9.4	0.95	22kW			Frequency	Hz			50					
85.9	1501	17	9.1	0.95				Number of poles	P			4	6				
97.3	1325	15	8.8	0.95				Rotational speed n	r/min			1470	980				
112.3	1148	13	8.4	0.95	11.1	16960	87	91.7	1.10			B8* X11*	6P				
132.7	971	11	8.0	0.95	13.7	13841	71	91.7	1.40								
162.2	795	9	6.6	0.95	16.4	11501	59	84.1	1.70								
18.5kW			Frequency	Hz	50		22.6	8382	43					78.7	2.25		
			Number of poles	P	4	6	27.7	6823	35					74.5	2.75		
			Rotational speed n	r/min	1470	980	B95 X128					4P					
1.7	29400	841	158.4	0	33.4	5653				29	71.2				3.35		
2.0	29400	731	158.4	0	42.2	4438				23	64.4				3.35		
2.3	29400	649	158.4	0	57.1	3280				17	60.5				3.35		
2.5	29400	595	158.4	0	84.3	2219					54.0				3.35		
3.0	29400	493	158.4	0	16.4	11501				59	66.5				0.95	B7* X10*	6P
3.8	29400	391	158.4	0	20.6	9162				47	63.4				1.10		
4.6	28755	319	158.4	1.00	22.6	8382				43	62.2				1.30		
5.8	22805	253	158.4	1.25	27.7	6823				35	58.9				1.30		
3.8	21500	391	91.7	0	33.4	5653				29	56.2				1.75		
4.6	21500	319	91.7	0	42.2	4484	23	47.8	2.15	B85 X118	4P						
5.1	21500	289	91.7	0	57.1	3314	17	47.8	2.15								
5.8	21500	253	91.7	0	62.6	3022	15	44.4	2.15								
7.9	16856	187	91.7	1.25	84.3	2242	11	40.9	2.15								
11.6	11403	121	91.7	1.35													

Notes:

- Models with * cannot be equipped with direct-connected motors;
- Models with "O" in the f_B column cannot use motors with 100% power. Please keep the load torque below "Ma" in the table during operation. Please install your own security device to protect the host;
- All models can be configured with 6P and 8P motors corresponding to the same motor base number;
- The allowable output torque and allowable radial force values of the three-stage transmission refer to the maximum values in the two-stage transmission.

Selection parameter table


Na	Ma	i	Fra	f _b	Machine model	Number of poles	Na	Ma	i	Fra	f _b	Machine model	Number of poles				
[r/min]	[Nm]		[kN]				[r/min]	[Nm]		[kN]							
22kW			Frequency	Hz	50		37kW			Frequency	Hz	50					
			Number of poles	P	4	6				Number of poles	P	4	6				
			Rotational speed n	r/min	1470	980				Rotational speed n	r/min	1475	980				
27.7	6823	35	46.9	0.90	B6* X9*	6P	16.6	19146	59	84.1	1.00	B8* X11*	6P				
33.4	5653	29	44.8	1.05			22.8	13954	43	78.7	1.35						
42.2	4484	23	40.2	1.35			28.0	11358	35	74.5	1.60						
51.1	3704	19	37.2	1.35			33.8	9411	29	71.2	2.00						
57.1	3314	17	34.9	1.35			42.6	7464	23	64.4	2.00						
64.7	2924	15	34.2	1.35			57.6	5517	17	60.5	2.00						
74.6	2534	13	33.4	1.35			85.2	3732	11	54.0	2.00						
88.2	2144	11	32.6	1.35			33.8	9411	29	56.2	1.00						
30kW			Frequency	Hz	50		42.6	7464	23	47.8	1.30	B7* X10*	6P				
			Number of poles	P	4	6	57.6	5517	17	47.8	1.30						
			Rotational speed n	r/min	1470	980	63.2	5030	15	44.4	1.30						
11.3	22891	87	158.4	1.30	B9* X12*	6P	45kW			Frequency	Hz	50					
13.8	18681	71	158.4	1.60						Number of poles	P	4	6				
16.6	15524	59	158.4	1.85						Rotational speed n	r/min	1475	980				
22.8	11314	43	150.0	2.45			13.8	28021	71	158.4	1.05	B9* X12*	6P				
28.0	9209	35	121.2	2.90			16.6	23285	59	158.4	1.25						
33.8	7630	29	121.2	3.35			22.8	16971	43	150.0	1.65						
42.6	6052	23	121.2	3.35			28.0	13813	35	121.2	1.95						
11.3	22891	87	91.7	0.80			33.8	11445	29	121.2	2.25			B8* X11*	6P		
13.8	18681	71	91.7	1.00	42.6	9077	23	121.2	2.25								
16.6	15524	59	84.1	1.25	22.8	16971	43	78.7	1.10								
22.8	11314	43	78.7	1.65	28.0	13813	35	74.5	1.35								
28.0	9209	35	74.5	2.00	33.8	11445	29	71.2	1.65								
33.8	7630	29	71.2	2.45	42.6	9077	23	64.4	1.65								
42.6	6052	23	64.4	2.45	57.6	6709	17	60.5	1.65								
57.6	4473	17	60.5	2.45	85.2	4539	11	54.0	1.65								
85.2	3026	11	54.0	2.45	33.8	11445	29	56.2	0.85	B7* X10*	6P						
22.8	11314	43	62.2	0.95	42.6	9077	23	47.8	1.00								
28.0	9209	35	58.9	0.95	57.6	6709	17	47.8	1.00								
33.8	7630	29	56.2	1.30	63.2	6117	15	44.4	1.00								
42.6	6052	23	47.8	1.60	85.2	4539	11	40.9	1.00								
57.6	4473	17	47.8	1.60	55kW			Frequency	Hz			50					
63.2	4078	15	44.4	1.60				Number of poles	P			4	6				
85.2	3026	11	40.9	1.60				Rotational speed n	r/min			1480	980				
42.6	6052	23	40.2	0.95	B6* X9*	6P	16.6	28460	59	158.4	1.00	B9* X12*	6P				
51.6	4999	19	37.2	0.95			22.8	20742	43	150.0	1.35						
57.6	4473	17	34.9	0.95			28.0	16883	35	121.2	1.60						
65.3	3947	15	34.2	0.95			33.8	13989	29	121.2	1.80						
75.4	3420	13	33.4	0.95			42.6	11095	23	121.2	1.80						
89.1	2894	11	32.6	0.95			28.0	16883	35	74.5	1.10						
37kW			Frequency	Hz			50		33.8	13989	29			71.2	1.35	B8* X11*	6P
			Number of poles	P			4	6	42.6	11095	23			64.4	1.35		
			Rotational speed n	r/min	1475	980	57.6	8200	17	60.5	1.35						
11.3	28232	87	158.4	1.05	B9* X12*	6P	75kW			Frequency	Hz	50					
13.8	23040	71	158.4	1.30						Number of poles	P	4	6				
16.6	19146	59	158.4	1.50						Rotational speed n	r/min	1480	980				
22.8	13954	43	150.0	2.00			228	27999	43	150.0	0.95	B9* X12*	6P				
28.0	11358	35	121.2	2.35			28.0	22790	35	121.2	1.15						
33.8	9411	29	121.2	2.70			33.8	18883	29	121.2	1.35						
42.6	7464	23	121.2	2.70			42.6	14976	23	121.2	1.35						

Notes:

- Models with * cannot be equipped with direct-connected motors;
- Models with "O" in the f_b column cannot use motors with 100% power. Please keep the load torque below "Ma" in the table during operation. Please install your own security device to protect the host;
- All models can be configured with 6P and 8P motors corresponding to the same motor base number;
- The allowable output torque and allowable radial force values of the three-stage transmission refer to the maximum values in the two-stage transmission.


3 Outline and Installation Dimensions

3.1 Overall installation dimensions of BW, BWD, XW, XWD types (single-stage)

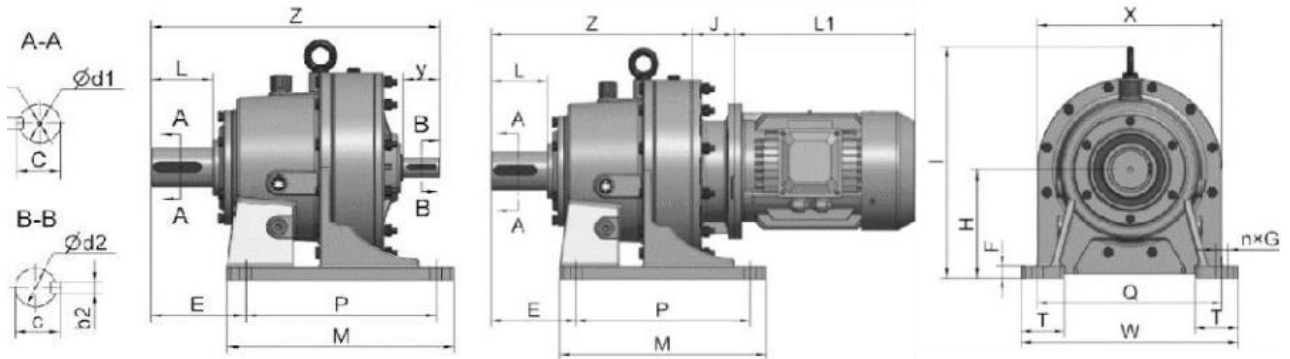


Machine model	Center height H	Shaft end size								Installation dimensions								Overall dimensions					
		Output shaft				Input shaft				E	F	P	Q	S	T	N	φG	M	W	Z		l	X
		d1 (h6)	b1	C	L	d2 (h6)	b2	C	y											BW	BWD		
BW.BWD09-9																							
B09	80	22	6	24.5	30	15	5	17	22	46.5	12	76	120	M5	30	4	11	100	144	192	142	155	140
B0	100	30	8	33	35	15	5	17	22	94	15	90	150	M8	35	4	11	120	185	214	165	190	168
B1	120	35	10	38	56	18	6	20.5	35	125	14	110	240	M10	55	4	13	160	280	263	194	250	200
B2	140	45	14	48.5	71	22	6	24.5	40	144	19	150	280	M10	60	4	13	200	320	320	246	296	240
B3	160	55	16	59	80	30	8	33	55	156	23	200	340	M12	75	4	17	250	390	390	294	355	300
B4	200	70	20	74.5	104	35	10	38	62	157	23	320	340	M12	80	4	22	380	400	481	370	430	340
B5	240	90	25	95	122	45	14	48.5	70	160	33	380	420	M16	80	4	22	440	470	564	438	513	400
B6	280	100	28	106	139	50	14	53.5	80	199	35	440	500	M20	90	4	26	520	560	670	528	605	500
B7	325	110	28	116	150	55	16	59	90	230	45	250×2	630	M24	105	6	30	600	690	775	578	706	575
B8	420	130	32	137	202	70	20	74.5	120	325	50	330×2	800	M30	140	6	32	810	880	1063	814	880	700
B9	540	180	45	190	327	90	25	95	150	481	58	420×2	1050	M42	200	6	45	1040	1160	1458	1151	1160	950
XW.XWD1-12																							
X1	100	25	8	28	35	15	5	17	22	61	12	90	150	M5	30	4	12	120	180	199	147	175	140
X2	100	25	8	28	33	15	5	17	22	101	15	90	180	M8	45	4	12	120	210	216	164	190	168
X3	140	35	10	38	56	18	6	20.5	35	152	18	100	250	M10	60	4	16	150	290	263	194	270	200
X4	150	45	14	48.5	73	22	6	24.5	40	168	19	145	290	M10	65	4	16	195	330	324	246	316	240
X5	160	55	16	59	91	30	8	33	55	204	23	150	370	M12	70	4	16	260	410	401	305	356	300
X6	200	65	18	69	89	35	10	38	62	125	27	275	380	M12	75	4	22	335	430	466	359	425	340
X7	220	80	22	85	107	40	12	43	65	143	27	320	420	M12	90	4	22	380	470	486	377	484	340
X8	250	90	25	95	122	45	14	48.5	70	157	35	380	480	M16	100	4	22	440	530	564	438	514	400
X9	290	100	28	106	141	50	14	53.5	80	186	40	480	560	M20	120	4	26	560	620	691	551	614	500
X10	325	110	28	116	150	55	16	59	90	230	45	250×2	630	M24	105	6	30	600	690	775	578	706	575
X11	420	130	32	137	202	70	20	74.5	120	325	50	330×2	800	M30	140	6	32	810	880	1063	814	880	700
X12	540	180	45	190	327	90	25	95	150	481	58	420×2	1050	M42	200	6	45	1040	1160	1458	1151	1160	950

3.2 Overall installation dimensions of BL, BLD, XLW, XLD types (single-stage)

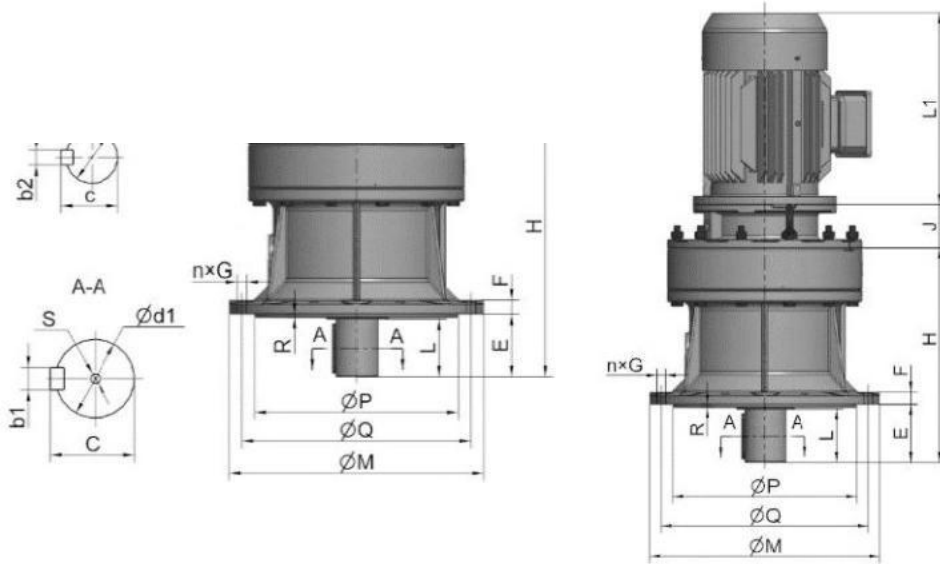


Machine model	Shaft end size								Installation dimensions								Overall dimensions			
	Output shaft				Input shaft				E	F	φG	N	P (h9)	Q	R	S	H			
	d1 (h6)	b1	C	L	d2 (h6)	b2	C	y									BL	BLD	M	
BLBLD09-9																				
B09	22	6	245	30	15	5	17	22	35	10	11	4	110	134	3	M5	192	142	159	
B0	30	8	33	35	15	5	17	22	39	14	11	4	140	160	3	M8	214	165	188	
B1	35	10	38	47	18	6	20.5	35	61	15	11	6	170	200	4	M10	263	194	230	
B2	45	14	48.5	61	22	6	24.5	40	70	16	11	6	200	230	4	M10	320	246	260	
B3	55	16	59	74	30	8	33	55	79	20	13	6	270	310	4	M12	390	294	340	
B4	70	20	74.5	92	35	10	38	62	100	22	15	8	320	360	5	M12	479	370	400	
B5	90	25	95	110	45	14	48.5	70	118	30	18	12	400	450	5	M16	564	438	490	
B6	100	28	106	130	50	14	53.5	80	138	35	22	12	460	520	8	M20	668	528	580	
B7	110	28	116	142	55	16	59	90	182	40	22	12	520	590	10	M24	775	578	650	
B8	130	32	137	202	70	20	74.5	120	211	50	38	12	680	800	10	M30	1061	814	880	
B9	180	45	190	320	90	25	95	150	370	60	39	8	900	1020	10	M42	1459	1151	1160	
XW.XWD1-12																				
X1	25	8	28	36	15	5	17	22	41	10	12	4	110	134	3	M5	201	147	159	
X2	25	8	28	33	15	5	17	22	39	14	12	6	130	160	3	M8	216	164	180	
X3	35	10	38	47	18	6	20.5	35	51	15	12	6	170	200	4	M10	263	194	230	
X4	45	14	48.5	63	22	6	24.5	40	79	15	12	6	200	230	4	M10	324	250	260	
X5	55	16	59	85	30	8	33	55	90	20	13	6	270	310	4	M12	401	305	340	
X6	65	18	69	80	35	10	38	62	90	22	16	8	316	360	5	M12	466	359	400	
X7	80	22	85	97	40	12	43	65	114	22	18	8	345	390	5	M12	486	377	430	
X8	90	25	95	110	45	14	48.5	70	118	30	18	12	400	450	5	M16	564	438	490	
X9	100	28	106	134	50	14	53.5	80	170	35	22	12	455	520	8	M20	694	551	580	
X10	110	28	116	142	55	16	59	90	182	40	22	12	520	590	10	M24	775	578	650	
X11	130	32	137	202	70	20	74.5	120	211	50	38	12	680	800	10	M30	1061	814	880	
X12	180	45	190	320	90	25	95	150	370	60	39	8	900	1020	10	M42	1459	1151	1160	

3.3 Overall installation dimensions of BWE, BWED, XWE, XWED types (double-stage)

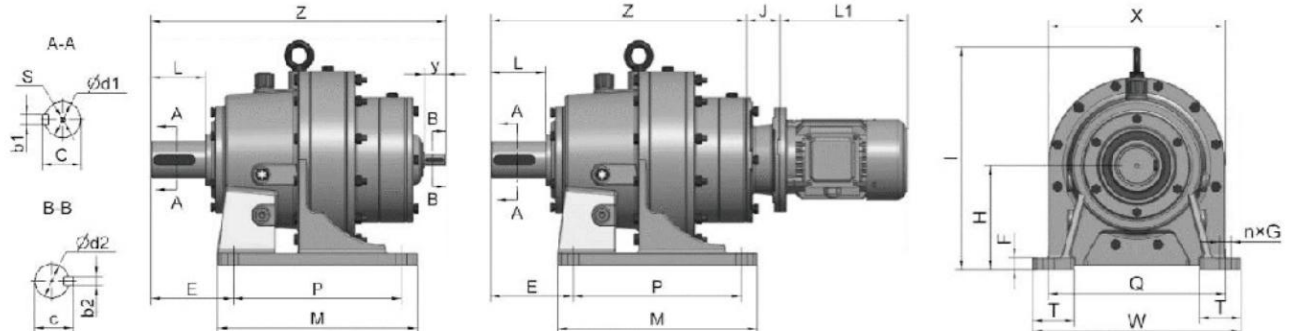


Machine model	Center height H	Shaft end size								Installation dimensions								Overall dimensions					
		Output shaft				Input shaft				E	F	P	Q	S	T	N	φG	M	W	Z		I	X
		d1 (h6)	b1	C	L	d2 (h6)	b2	C	y											BWE	BWED		
BWE.BWED10-95																							
B10	120	35	10	38	56	15	5	17	22	125	14	110	240	M10	55	4	13	160	280	317	267	250	200
B20	140	45	14	48.5	71	15	5	17	22	144	19	150	280	M10	60	4	13	200	320	369	315	306	240
B31	160	55	16	59	80	18	6	20.5	35	156	23	200	340	M12	75	4	17	250	390	443	376	356	300
B41	200	70	20	74.5	104	18	6	205	35	157	23	320	340	M12	80	4	22	380	400	523	454	425	340
B42	200	70	20	74.5	104	22	6	24.5	40	157	23	320	340	M12	80	4	22	380	400	554	479	425	340
B52	240	90	25	95	122	22	6	24.5	40	160	33	380	420	M16	80	4	22	440	470	623	548	504	400
B53	240	90	25	95	122	30	8	33	55	160	33	380	420	M16	80	4	22	440	470	661	561	504	400
B63	280	100	28	106	139	30	8	33	55	199	35	440	500	M20	90	4	26	520	560	746	645	605	500
B64	280	100	28	106	139	35	10	38	62	199	35	440	500	M20	90	4	26	520	560	783	671	605	500
B74	325	110	28	116	150	35	10	38	62	230	45	250×2	630	M24	105	6	30	600	690	836	725	706	575
B84	420	130	32	137	202	35	10	38	62	325	50	330×2	800	M30	140	6	32	810	880	1074	962	880	700
B85	420	130	32	137	202	45	14	48.5	70	325	50	330×2	800	M30	140	6	32	810	880	1098	970	880	700
B95	540	180	45	190	327	45	14	48.5	70	481	58	420×2	1050	M42	200	6	45	1040	1160	1440	1320	1160	950
XWE.XWED32-128																							
X32	140	35	10	38	56	15	5	17	22	152	18	100	250	M10	60	4	16	150	290	317	264	270	200
X42	150	45	14	48.5	73	15	5	17	22	168	19	145	290	M10	65	4	16	195	330	370	315	316	240
X53	160	55	16	59	91	18	6	20.5	35	204	23	150	370	M12	70	4	16	260	410	457	387	356	300
X63	200	65	18	69	89	18	6	20.5	35	125	27	275	380	M12	75	4	22	335	430	510	441	425	340
X64	200	65	18	69	89	22	6	24.5	40	125	27	275	380	M12	75	4	22	335	430	541	466	425	340
X74	220	80	22	85	107	22	6	24.5	40	143	27	320	420	M12	90	4	22	380	470	561	486	484	340
X84	250	90	25	95	122	22	6	24.5	40	157	35	380	480	M16	100	4	22	440	530	626	548	514	400
X85	250	90	25	95	122	30	8	33	55	157	35	380	480	M16	100	4	22	440	530	662	586	514	400
X95	290	100	28	106	141	30	8	33	55	186	40	480	560	M20	120	4	26	560	620	768	667	614	500
X96	290	100	28	106	141	35	10	38	62	186	40	480	560	M20	120	4	26	560	620	805	695	614	500
X106	325	110	28	116	150	35	10	38	62	230	45	250×2	630	M24	105	6	30	600	690	836	725	706	575
X117	420	130	32	137	202	40	12	43	65	325	50	330×2	800	M30	140	6	32	810	880	1077	962	880	700
X118	420	130	32	137	202	45	14	48.5	70	325	50	330×2	800	M30	140	6	32	810	880	098	970	880	700
X128	540	180	45	190	327	45	14	48.5	70	481	58	420×2	1050	M42	200	6	45	1040	1160	1440	1320	1160	950

3.4 Overall installation dimensions of BLE, BLED, XLE, XLE types (double-stage)

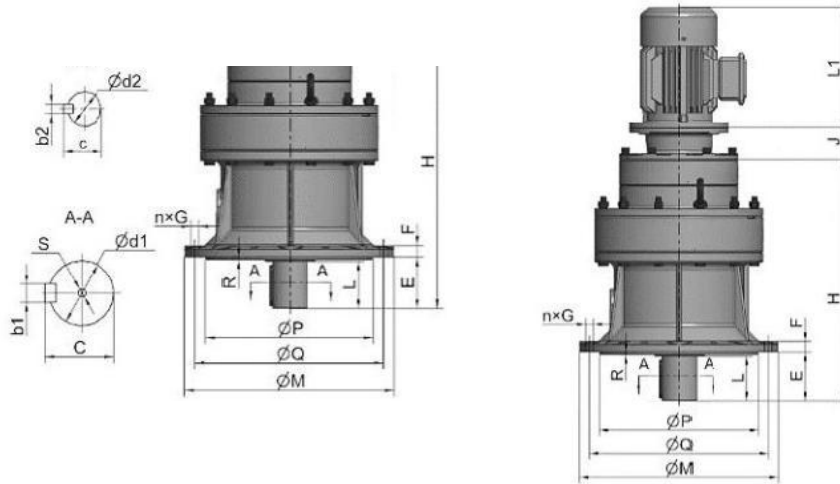

Machine model	Shaft end size								Installation dimensions								Overall dimensions		
	Output shaft				Input shaft				E	F	φG	N	P (h9)	Q	R	S	H		M
	d1 (h6)	b1	C	L	d2 (h6)	b2	C	y									BLE	BLED	
BLE.BLED10-95																			
B10	35	10	38	47	15	5	17	22	61	15	11	6	170	200	4	M10	317	267	230
B20	45	14	48.5	61	15	5	17	22	70	16	11	6	200	230	4	M10	368	318	260
B31	55	16	59	74	18	6	20.5	35	79	20	13	6	270	310	4	M12	446	376	340
B41	70	20	74.5	92	18	6	20.5	35	100	22	15	8	320	360	5	M12	521	454	400
B42	70	20	74.5	92	22	6	24.5	40	100	22	15	8	320	360	5	M12	554	479	400
B52	90	25	95	110	22	6	24.5	40	118	30	18	12	400	450	5	M16	627	548	490
B53	90	25	95	110	30	8	33	55	118	30	18	12	400	450	5	M16	663	561	490
B63	100	28	106	130	30	8	33	55	138	35	22	12	460	520	8	M20	745	645	580
B64	100	28	106	130	35	10	38	62	138	35	22	12	460	520	8	M20	780	671	580
B74	110	28	116	142	35	10	38	62	182	40	22	12	520	590	10	M24	836	725	650
B84	130	32	137	202	35	10	38	62	211	50	38	12	680	800	10	M30	1074	962	880
B85	130	32	137	202	45	14	48.5	70	211	50	38	12	680	800	10	M30	1098	970	880
B95	180	45	190	320	45	14	48.5	70	370	60	39	8	900	1020	10	M42	1440	1320	1160
XLE.XLED32-128																			
X32	35	10	38	47	15	5	17	22	51	15	12	6	170	200	4	M10	317	264	230
X42	45	14	48.5	63	15	5	17	22	79	15	12	6	200	230	4	M10	370	320	260
X53	55	16	59	85	18	6	20.5	35	90	20	13	6	270	310	4	M12	457	389	340
X63	65	18	69	80	18	6	20.5	35	90	22	16	8	316	360	5	M12	510	441	400
X64	65	18	69	80	22	6	24.5	40	90	22	16	8	316	360	5	M12	546	466	400
X74	80	22	85	97	22	6	24.5	40	114	22	18	8	345	390	5	M12	561	486	430
X84	90	25	95	110	22	6	24.5	40	118	30	18	12	400	450	5	M16	627	548	490
X85	90	25	95	110	30	8	33	55	118	30	18	12	400	450	5	M16	663	588	490
X95	100	28	106	134	30	8	33	55	170	35	22	12	455	520	8	M20	770	667	580
X96	100	28	106	134	35	10	38	62	170	35	22	12	455	520	8	M20	807	694	580
X106	110	28	116	142	35	10	38	62	182	40	22	12	520	590	10	M24	836	725	650
X117	130	32	137	202	40	12	43	65	211	50	38	12	680	800	10	M30	1077	983	880
X118	130	32	137	202	45	14	48.5	70	211	50	38	12	680	800	10	M30	1098	970	880
X128	180	45	190	320	45	14	48.5	70	370	60	39	8	900	1020	10	M42	1440	1320	1160


3.5 Connecting flange dimension chart of motor connector type

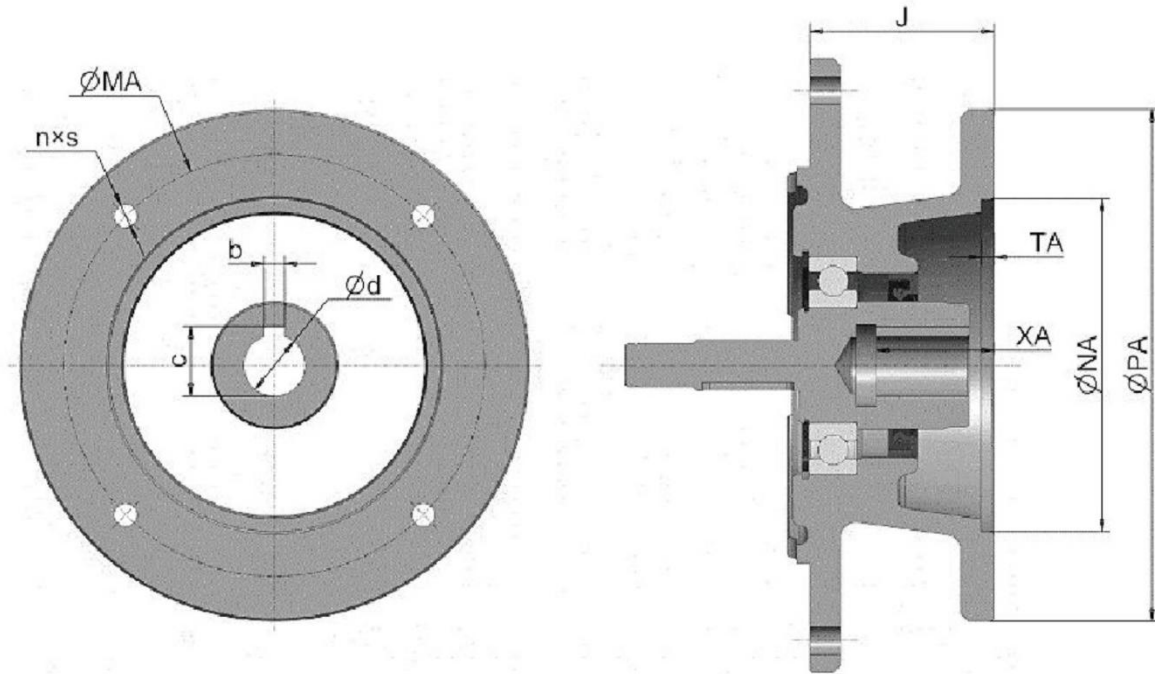

Machine model	Configuration motor			Dimensions									
	kW	Base No.	Number of poles	NA	MA	PA	J	TA	n×S	XA	d	b	c
B09/X1	0.18	63	4P	95	115	140	54	4	4×M8	23	11	4	12.8
	0.25, 0.37	71		110	130	160	71	4	4×M8	30	14	5	16.3
	0.55	80		130	165	200	71	4	4×M10	40	19	6	21.8
B0/X2 B10/X32 B20/X42	0.18	63		95	115	140	55	4	4×M8	23	11	4	12.8
	0.25, 0.37	71		110	130	160	72	4	4×M8	30	14	5	16.3
	0.55, 0.75	80		130	165	200	82	4	4×M10	40	19	6	21.8
	1.1	90S		130	165	200	82	4	4×M10	50	24	8	27.3
B1/X3 B31/X53 B41/63	0.25, 0.37	71		110	130	160	84	4	4×M8	30	14	5	16.3
	0.55, 0.75	80		130	165	200	79	4	4×M10	40	19	6	21.8
	1.1, 1.5	90		130	165	200	79	4	4×M10	50	24	8	27.3
	2.2	100L		180	215	250	88	4.5	4×M12	60	28	8	31.3
B2/X4 B42/X64 B52/X84	0.55, 0.75	80		130	165	200	72	5	4×M10	40	19	6	21.8
	1.1, 1.5	90	130	165	200	72	5	4×M10	50	24	8	27.3	
	2.2, 3	100L	180	215	250	72	5	4×M12	60	28	8	31.3	
	4	112M	180	215	250	72	5	4×M12	60	28	8	31.3	

Machine model	Configure motor			Size									
	kW	Frame size	Number of poles	NA	MA	PA	J	TA	n×S	XA	d	b	c
B3/X5 B53/X85 B63/X95	0.55、0.75	80	4P	130	165	200	73	5	4×M10	40	19	6	21.8
	1.1, 1.5	90		130	165	200	73	5	4×M10	50	24	8	27.3
	2.2, 3	100L		180	215	250	73	5	4×M12	60	28	8	31.3
	4	112M		180	215	250	73	5	4×M12	60	28	8	31.3
	5.5、7.5	132		230	265	300	112	5	4×M12	80	38	10	41.3
	11	160M		250	300	350	151	5	4×M16	110	42	12	45.3
B4/X6/X7 B74/X106 B84/X117	2.2, 3	100L		180	215	250	76	5	4×M12	60	28	8	31.3
	4	112M		180	215	250	76	5	4×M12	60	28	8	31.3
	5.5、7.5	132		230	265	300	97	5	4×M12	80	38	10	41.3
	11	160M		250	300	350	151	5	4×M16	110	42	12	45.3
B5/X8 B85/X118 B95/X128	2.2, 3	100L		180	215	250	142	6	4×M12	60	28	8	31.3
	4	112M		180	215	250	142	6	4×M12	60	28	8	31.3
	5.5、7.5	132		230	265	300	95	5	4×M12	80	38	10	41.3
	11, 15	160		250	300	350	127	6	4×M16	110	42	12	45.3
	18.5	180M		250	300	350	127	6	4×M16	110	48	14	51.8
B6/X9	5.5	132M		230	265	300	144	6	4×M12	80	38	10	41.3
	7.5、11	160		250	300	350	121	6	4×M16	110	42	12	45.3
	15	180L		250	300	350	121	6	4×M16	110	48	14	51.8
	18.5, 22	200L	300	350	400	124	6	4×M16	110	55	16	59.3	
B7/X10	7.5, 11	160	250	300	350	129	6	4×M16	110	42	12	45.3	
	15	180L	250	300	350	129	6	4×M16	110	48	14	51.8	
	18.5, 22	200L	300	350	400	129	6	4×M16	110	55	16	59.3	
	30	225M	350	400	450	161	7	8×M16	140	60	18	64.4	
	37	250M	450	500	550	161	7	8×M16	140	65	18	69.4	
B8/X11	18.5、22	200L	300	350	400	204	7	4×M16	110	55	16	59.3	
	30	225M	350	400	450	165	7	8×M16	140	60	18	64.4	
	37	250M	450	500	550	229	7	8×M16	140	65	18	69.4	
	45, 55	280	450	500	550	229	7	8×M16	140	75	20	79.9	
B9/X12	30	225M	350	400	450	236	7	8×M16	140	60	18	64.4	
	37	250M	450	500	550	236	7	8×M16	140	65	18	69.4	
	45, 55	280	450	500	550	236	7	8×M16	140	75	20	79.9	
	75	315S	550	600	660	266	7	8×M20	170	80	22	85.4	

3.6 Appearance and installation dimensions of three-phase asynchronous motor- B5

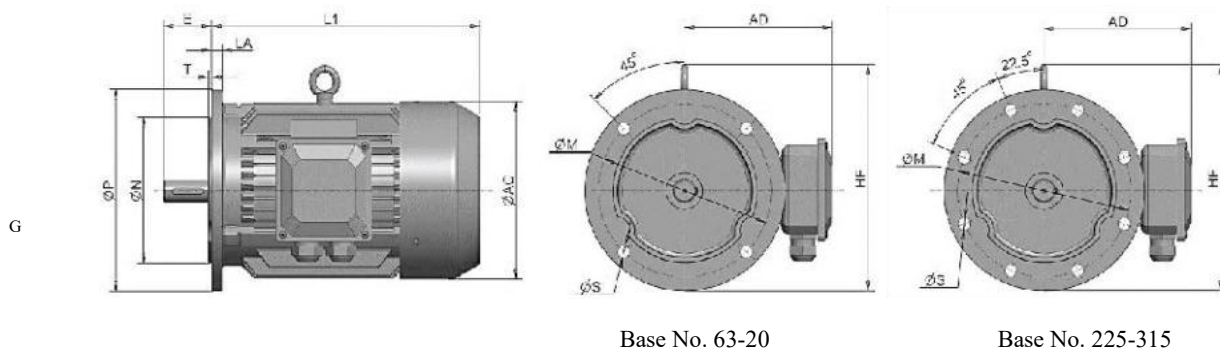


Base No. 63-20

Base No. 225-315

Number of poles	Rated power 4P (kW)	Rated power 6P (kW)	d		E		F		G		M	N	P	S	T	AC	AD	LA	HF	L1
			4-10P	4-10P	4-10P	4-10P	M	N	P	S										4-10P
63M	0.18		11	23	4	12.5	115	95	140						3	130	70	10	130	207
71M1	0.25	0.18	14	30	5	16	130	110	160	10										225
71M2	0.37	0.25																		225
80M1	0.55	0.37	19	40	6	21.5	165	130	200	12					3.5	175	145	12	185	255
80M2	0.75	0.55																		
90S	1.1	0.75	24	50	8	27														270
90L	1.5	1.1																		295
100L1	2.2	1.5	28	60		31	215	180	250	15					4	215	180	14	245	325
100L2	3																			
112M	4	2.2	38	80	10	41	265	230	300											340
132S	5.5	3																		390
132M1	7.5	4	38	80	10	41	265	230	300											430
132M2		5.5																		430
160M	11	7.5	42	110	12	45	300	250	350											505
160L	15	11																		560
180M	18.5		48	110	14	51.5														590
180L	22	15																		630
200L1	30	18.5	55		16	59	350	300	400	19										660
200L2		22																		660
225S	37		60	140	18	64	400	350	450											675
225M	45	30																		705
250M	55	37	65	140	18	69														770
280S	75	45																		845
280M	90	55	75	140	20	79.5	500	450	550											895
315S	110	75																		1100

3.7 IEC motor shape and position tolerance requirements

The user's self-equipped or self-prepared motor must meet the following geometric tolerance requirements.

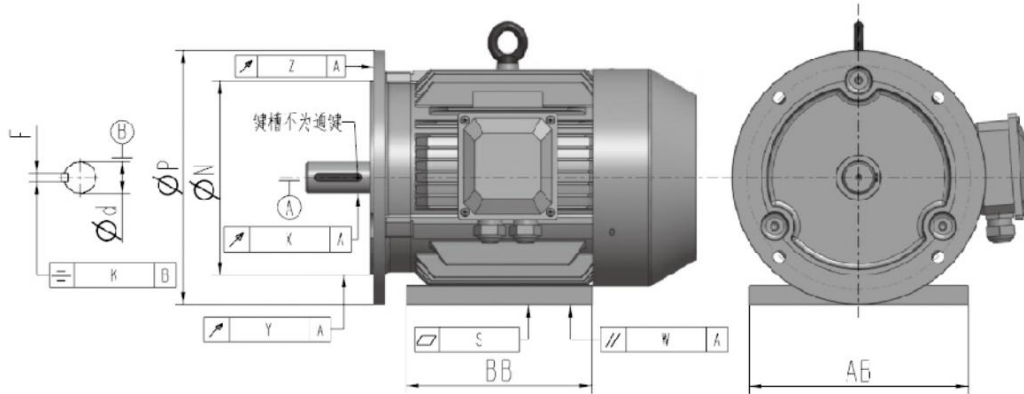

1. Various runout of motor mounting surface(B5, B35)

Number of poles	Axis runout (X)		Stop runout (Y)		Face runout (Z)	
	Shaft extension diameter (d)	Level 9 (Halfway axis extension)	Flange stop diameter (N)	Level 9	Outer circle diameter (P)	Level 9
63 ~ 315	10~18	0.04	60~95	0.08	60~95	0.08
	18~30	0.04	>95~230	0.1	>95~230	0.1
	>30~50	0.05	>230~450	0.125	>230~450	0.125
	>50~80	0.06	>450~680	0.16	>450~680	0.16

2. Tolerance of symmetry of keyway on motor shaft extension (B5, B35)

Keyway width (F)	Symmetry tolerance (K)
4	0.018
5	
6	
8	0.022
10	
12	
14	0.030
16	
18	
20	
22	0.037

3. Tolerance of parallelism of motor axis to anchor bearing surface (B35)

Number of poles	Parallelism tolerance (W)
63~250	0.40
>250~315	0.75

4. Flatness tolerance of motor anchor support surface (B35)

Maximum size in AB or BB	Flatness tolerance (S)
>100~160	0.12
>160~250	0.15
>250~400	0.20
>400~630	0.25
>630~1000	0.30

3.8 Reducer and motor weight

1) Weight of the first-stage-motor and direct-coupled reducer (unit: kg)

Specifications	BW09	BW0	BW1	BW2	BW3	BW4	BW5	XW1	XW2	XW3
Weight	8	9	18	31	54	93	145	9	9	18
Specifications	XW4	XW5	XW6	XW7	XW8	BL09	BL0	BL1	BL2	BL3
Weight	32	55	93	103	160	8	8	18	29	54
Specifications	BL4	BL5	XL1	XL2	XL3	XL4	XL5	XL6	XL7	XL8
Weight	90	146	8	8	18	29	54	93	98	146

2) Weight of primary motor receiver type/twin-shaft type reducer (unit: kg)

Specifications	BW09	BW0	BW1	BW2	BW3	BW4	BW5	BW6	BW7	BW8	BW9	XW1
Weight	12	15	25	42	71	119	181	347	500	1047	2347	13
Specifications	XW2	XW3	XW4	XW5	XW6	XW7	XW8	XW9	XW10	XW11	XW12	BL09
Weight	15	25	42	72	119	129	197	348	500	1047	2347	12
Specifications	BLO	BL1	BL2	BL3	BL4	BL5	BL6	BL7	BL8	BL9	XL1	XL2
Weight	14	25	40	71	116	183	344	512	1010	2416	12	14
Specifications	XL3	XL4	XL5	XL6	XL7	XL8	XL9	XL10	XL11	XL12		
Weight	25	40	71	119	123	183	353	512	1010	2416		

3) Weight of the second-stage-motor and direct-coupled reducer (unit: kg)

Specifications	BWE10	BWE20	BWE31	BWD41	BWE42	BWE52	BWE53	BWE63	BWE64	BWE74	BWE84
Weight	28	42	74	117	127	186	196	357	378	534	1024
Specifications	BWE85	BWE95	XWE32	XWE42	XWE53	XWE63	XWE64	XWE74	XWE84	XWE85	XWE95
Weight	1054	2243	28	43	75	117	127	137	201	211	358
Specifications	XWE96	XWE106	XWE117	XWE118	XWE128	BLE10	BLE20	BLE31	BLE41	BLE42	BLE52
Weight	378	534	1024	1054	2243	28	42	73	114	124	188
Specifications	BLE53	BLE63	BLE64	BLE74	BLE84	BLE85	BLE95	XLE32	XLE42	XLE53	XLE63
Weight	198	354	373	544	987	1017	2174	28	42	73	117
Specifications	XLE64	XLE74	XLE84	XLE85	XLE95	XLE96	XLE106	XLE117	XLE118	XLE128	
Weight	127	131	188	198	363	383	544	987	1017	2174	

4) Weight of secondary motor receiver type/twin-shaft type reducer (unit: kg)

Specifications	BWE10	BWE20	BWE31	BWD41	BWE42	BWE52	BWE53	BWE63	BWE64	BWE74	BWE84
Weight	34	49	81	124	138	197	213	374	421	557	1050
Specifications	BWE85	BWE95	XWE32	XWE42	XWE53	XWE63	XWE64	XWE74	XWE84	XWE85	XWE95
Weight	1090	2210	34	50	82	124	138	148	212	228	380
Specifications	XWE96	XWE106	XWE117	XWE118	XWE128	BLE10	BLE20	BLE31	BLE41	BLE42	BLE52
Weight	422	557	1050	1090	2210	34	47	81	121	135	199
Specifications	BLE53	BLE63	BLE64	BLE74	BLE84	BLE85	BLE95	XLE32	XLE42	XLE53	XLE63
Weight	215	371	417	569	1013	1053	2279	34	48	81	124
Specifications	XLE64	XLE74	XLE84	XLE85	XLE95	XLE96	XLE106	XLE117	XLE118	XLE128	
Weight	138	142	199	215	375	427	569	1013	1053	2279	

Note: The weight of the above reducer is an average value, excluding the weight of the motor, and is for reference only.

5) Weight of three-phase asynchronous motor-B5 (unit: kg)

Motor model	63M1-4	71M1-4	71M2-4	80M1-4	80M2-4	90S-4	90L-4	100L1-4	100L2-4	112M-4	132S-4
Rated power(kW)	0.18	0.25	0.37	0.55	0.75	1.1	1.5	2.2	3	4	5.5
Weight (kg)	8	10	10.5	14	14.7	21	27.5	31	35	41	65
Motor model	132M-4	160M-4	160L-4	180M-4	180L-4	200L-4	225S-4	225M-4	250M-4	280S-4	
Rated power(kW)	7.5	11	15	18.5	22	30	37	45	55	75	
Weight (kg)	71.5	110	132	164	190	245	285	325	400	553	
Motor model	180L-6	200L1-6	200L2-6	225M-6	250M-6	280S-6	280M-6	315S-6	315M-6	315L1-6	
Rated power(kW)	15	18.5	22	30	37	45	55	75	90	110	
Weight (kg)	180	222	235	290	375	492	550	930	1030	1150	

Note: The motor weight of different manufacturers is slightly different, and the above motor weight is for reference only.

4 Instructions for use and lubrication

4.1 Instructions for use

1. The reducer is suitable for 24-hour continuous working system and allows forward and reverse operation.
2. The output shaft steering of the first-stage transmission reducer is opposite to the input shaft steering, and the output shaft steering of the second-stage transmission reducer is the same as the input shaft steering.
3. The reducer has no self-locking function. If used in dangerous situations such as lifting devices, a brake motor should be selected or a brake device should be added at the input end.
4. The output shaft of the reducer cannot withstand axial forces.
5. Overload protection devices should be installed in use situations where overload may occur.
6. The base-type reducer should be installed on a very solid horizontal foundation without vibration. In applications where inclined installation must be required, the inclination of the axis of the reducer shall not be greater than $\pm 15^\circ$.
7. Please contact the technical department of our company when the reducer operates in harsh working conditions, frequent starts and stops, and high or low temperature situations.
8. The shaft extension of the input shaft and output shaft of the reducer is cylindrical and connected by ordinary flat buttons. The dimensions of common flat buttons are in accordance with the provisions of GB1096 “Common Type Flat Buttons”.
9. When the reducer is connected with the coupling of the matching machinery, the coaxiality of the axial lines of the two shall not exceed the range allowed by the coupling.
10. When the reducer is connected with the gear and sprocket, the parallelism of the axial lines of the two must be guaranteed.
11. When using a sprocket for transmission, do not put the rack and pinion too loosely, otherwise it will produce impact force when starting. It is recommended to change the shell material to ductile iron to strengthen the shell strength.
12. Direct hammering should not be used when connecting couplings, gears, sprockets and other coupling parts to the output shaft of the reducer. The bolts should be screwed into the screw holes at the extended end of the shaft and pressed into them through the pressure plate.
13. The installed reducer must be trial-run before formal use. Gradually load and operate under the condition of normal no-load operation.

4.2 Instructions for lubrication

1. Lubrication method

One-stage transmission lubrication method

Machine model Installation form	B09	B0	B1	B2	B3	B4	B5	B6	B7	B8	B9
Footplate-type M1 mounting	Grease lubrication			Oil bath lubrication			Cyclic lubrication				
Flange-type M4 installation											

Two-stage transmission lubrication method

Machine model Installation form	B10	B20	B31	B41	B42	B52	B63	B74	B84	B85	B95
Footplate-type M1 mounting	Grease lubrication			Oil bath lubrication							
Flange-type M4 installation				Cyclic lubrication							

Notes:a.Lubrication method of X series reducer refers to corresponding B series models;

b. Please contact our technical department for other installation types.

2.All grease lubrication machines listed in the above table have been injected before leaving the factory and can be used directly. Replenish once every 1-2 months. It is recommended to use 2 # lithium grease or 00 # reducer grease. It is suitable for use at -5 °C ~ 55 °C ambient temperature. For other special environments, please contact our technical department.

3. It adopts oil lubrication models. The oil has been drained before leaving the factory. Please add enough oil according to the requirements of the oil label before use. See the table below for recommended lubricating oil.


	Domestic (Medium-loaded and extremely- pressured gear oil)	Esso	Mobil	Shell
-10°C~5°C	L-CKC68	Spartan EP 68	Mobil gear oil 626 (IOS VG68)	Omala can withstand pressure 68
0°C~35°C	L-CKC100 L-CKC150	Spartan EP 100 EP 150	Mobil gear oil 627 629 (IOS VG100, 150)	Omala can withstand pressure 100 150
30°C~50°C	L-CKC220 L-CKC320	Spartan EP 220 EP 320	Mobil gear oil 630 632 633 634 (IOS VG200, 320)	Omala can withstand pressure 220 320

4.When filling lubricating oil, the oil level should not exceed the upper limit of oil standard, nor should it be lower than the lower limit of oil standard. The oil level should be observed frequently and the lubricating oil of the same grade should be replenished in time during operation.

5.For other usage and maintenance requirements, please refer to the Product Instruction Manual,NO.002M.

5 Rack of chemical reaction tank

5.1 Rack of JBT-type (79 standard) glass-lined reaction tank

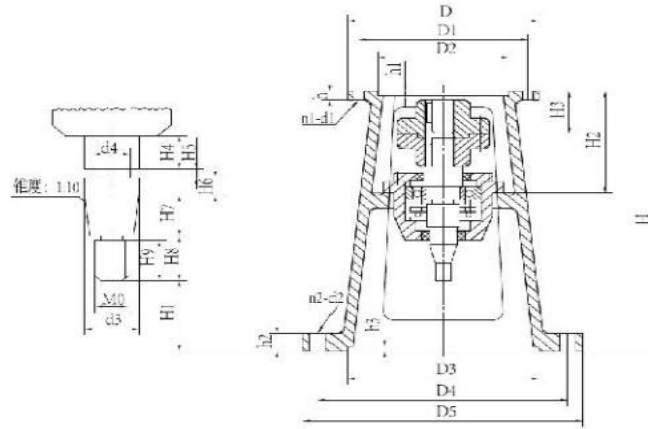


Main parameters and dimensions of JBT-type rack (79 standard)

Rack model	Input interface						Output interface						H	H1	H2	H3
	D	D1	D2	h	h1	n1-d1	D3	D4	D5	h2	h3	n2-d2				
JBT1-B1(X3)	230	200	170	20	6	6-12	220	270	305	22	7	4-24	514	157	185	75
JBT2-B1(X3)	230	200	170	20	6	6-12	250	300	335	22	7	4-24	517	150	190	80
JBT2-B2(X4)	260	230	200	20	7	6-13	250	300	335	25	7	4-24	530	134	210	94
JBT3-B2(X4)	260	230	200	20	7	6-13	295	350	392	26	7	4-26	560	164	210	94
JBT3-B3(X5)	340	310	270	20	7	6-13	295	350	392	26	7	4-26	560	164	210	100
JBT4-B3(X5)	340	310	270	20	7	6-13	345	400	442	26	7	4-26	635	203	210	100
JBT5-B3(X5)	340	310	270	22	7	6-13	390	450	498	26	7	4-30	640	193	210	100
JBT5-B4(X6)	400	360	320(316)	22	7	8-16	390	450	498	26	7	4-30	680	193	250	120
JBT6-B4(X6)	400	360	320(316)	22	7	8-16	435	500	548	30	7	8-30	736	215	250	120
JBT6-X7	430	390	345	22	7	8-18	435	500	548	30	7	8-30	736	215	250	120
JBT6-B5(X8)	490	450	400	22	7	12-18	435	500	548	30	7	8-30	736	215	270	145
JBT7-B5(X8)	490	450	460(455)	26	10	12-18	440	550	600	30	10	12-22	805	180	296	145
JBT8-B6(X9)	580	520	460(455)	30	10	12-22	500	550	600	32	10	12-22	820	150	362	177
JBT9-B7(X10)	650	590	520	30	12	12-22	560	650	700	35	10	12-27	1100	326	455	204

Rack model	H4	H5	H6	H7	H8	H9	d3	d4	MO	Volume of reaction tank (L)
JBT1-B1(X3)	45	4	6	33	34	28	30	24	M24×3	50-100
JBT2-B1(X3)	40	5	6	44	32	25	39	33	M33×3.5	200
JBT2-B2(X4)	45	5	6	47	34	27	39	32	M33×3.5	200
JBT3-B2(X4)	45	5	6	47	34	27	39	32	M33×3.5	300-500
JBT3-B3(X5)	42	5	6	47	34	27	39	32	M33×3.5	300-500
JBT4-B3(X5)	50	5	8	53	44	35	50	41.5	M42×4.5	1000-2000
JBT5-B3(X5)	55	5	8	58	49	39	60	51.5	M52×5	3000
JBT5-B4(X6)	55	5	8	58	49	39	60	51.5	M52×5	3000
JBT6-B4(X6)	75	9	8	65	52	42	70	61.5	M64×6	5000
JBT6-X7	75	9	8	65	52	42	70	61.5	M64×6	5000
5000	75	9	8	65	52	42	70	61.5	M64×6	5000
JBT7-B5(X8)	74	8	10	89	52	44	90	79	M80×6	
JBT8-B6(X9)	48	9	10	90	60	52	100	89	M90×6	
JBT9-B7(X10)	50	10	10	100	50	46	110	99	M98×6	

Note: JBT6 thread M0 can be M52×5, JBT7, JBT8, and JBT9 thread MO can be M80×2, M90×2, M98×2. Please specify when ordering.

5.2 DJ, LDJ types rack

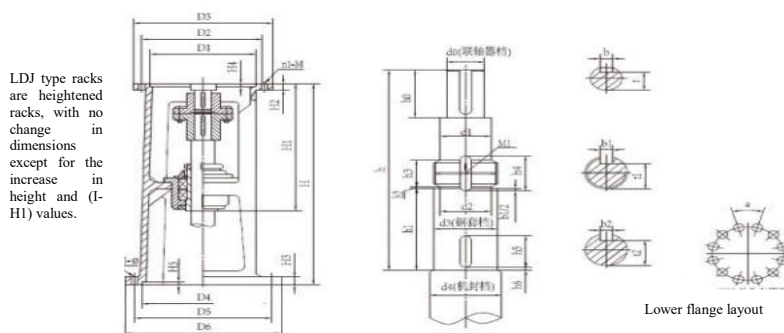

Main parameters and dimensions of DJ, LDJ types with single fulcrum frame


Rack model	H1	H2	H3	H4	H5	Input interface				Output interface				
						D1	D2	D3	n1-M	D4	D5	6	0	n2-φ2
DJ.LDJ30-B0	320	15	20	4	6	140	160	190	4-M10	240	285	315	30	12-214
DJ.LDJ30-B1(X3)	320	15	20	4	6	170	200	230	6-M12	240	285	315	30	12-014
DJ.LDJ35-B1(X3)	334	17	20	5	6	170	200	230	6-M10	260	320	360	30	12-214
DJ.LDJ40-B2(X4)	334	17	20	4	6	200	230	260	6-012	260	320	360	30	12-014
DJ.LDJ45-B2(X4)	338	20	20	5	6	200	230	260	6-012	260	320	360	30	12-014
DJ.LDJ55-B3(X5)	372	22	24	6	6	270	310	340	6-013.5	325	400	435	30	12-214
DJ.LDJ65-B4(X6)	447	22	24	6	6	320(316)	360	400	8-015	350	420	460	30	12-218
DJ.LDJ70-B4(X6)	447	22	24	6	6	320(316)	360	400	8-215	350	420	460	30	12-018
DJ.LDJ80-B4(X6)	495	22	28	6	8	320(316)	360	400	8-015	380	455	495	30	12-018
DJ.LDJ80-X7	495	22	28	6	8	345	390	430	8-018	380	455	495	30	12-018
DJ.LDJ80-B5(X8)	495	22	28	6	8	400	450	490	12-218	380	455	495	30	12-218
DJ.LDJ90-B5(X8)	519	22	28	7	8	400	450	490	12-218	430	510	555	30	12-223
DJ.LDJ100-B6(X9)	535	25	28	9	10	460(455)	520	580	12-222	480	560	600	22.5	16-223
DJ.LDJ110-B7(X10)	660	30	28	11	10	520	590	650	12-022	560	650	700	22.5	16-027
DJ.LDJ120-B7(X10)	660	30	28	11	10	520	590	650	12-022	560	650	700	22.5	16-027
DJ.LDJ130-B8(X11)	790	45	40	12	10	680	800	880	12-038	720	810	880	18	20-227
DJ.LDJ140-B8(X11)	790	45	40	12	12	680	800	880	12-038	720	810	880	18	20-227
DJ.LDJ180-B9(X12)	910	55	50	14	12	960	1080	1160	8-a39	970	1080	1160	18	20-233

Model	Agitator shaft end size																				DJ type	LDJ type
	h (B/X)	h0	h1	h2	h3	h4	h5	h6	d0	d1	d2	M1	d3(h9)	d4	b	b1	t1	b2	t2	H		
DJ.LDJ30-B0	250/254	53	103	3	13	22	30	3	30	32	32.8	M35×1.5	35	40	8	26	6	31	6	32	550	700
DJ.LDJ30-B1(X3)	250/254	53	03	3	13	22	30	3	30	32	32.8	M35×1.5	35	40	8	26	6	31	6	32	550	700
DJ.LDJ35-B1(X3)	253	53	3	3	15	24	40	3	35	42	42.8	M45×1.5	45	50	10	30	6	41	6	42	600	750
DJ.LDJ40-B2(X4)	242/249	69	13	3	15	24	40	3	40	42	42.8	M45×1.5	45	50	12	35	6	41	6	42	600	750
DJ.LDJ45-B2(X4)	246	69	113	3	15	28	40	3	45	47	47.8	M50×1.5	50	65	14	40	8	46	8	46	600	750
DLIDJ55-B3(X5)	274/272	80	18	4	15	27	40	3	55	57	57	M60×2	60	65	16	49	8	56	8	56	660	760
DJ.LDJ65-B4(X6)	333	87	143	4	18	32	50	3	65	71	72	M75×2	75	80	18	58	10	59	10	70	720	870
DJ.LDJ70-B4(X6)	333/327	87	43	4	18	32	50	3	70	71	72	M75×2	75	80	20	63	10	69	0	70	720	870
DJ.LDJ80-B4(X6)	371/340	91	63	4	18	32	60	3	80	81	82	M85×2	85	90	22	71	10	79	0	80	785	935
DJ.LDJ80-X7	371	91	163	4	18	32	60	3	80	81	82	M85×2	85	90	22	71	10	79	10	80	785	935
DJ.LDJ80-B5(X8)	365	91	163	4	18	32	60	3	80	81	82	M85×2	85	90	22	71	10	79	10	80	785	935
DJ.LDJ90-B5(X8)	375	125	68	4	20	36	60	3	90	91	92	M95×2	95	110	25	81	12	B9	2	90	805	955
DJ.LDJ100-B6(X9)	386/360	134	78	4	24	42	60	3	100	111	112	M115×2	115	125	28	90	14	09	14	10	820	1020
DJ.LDJ110-B7(X10)	456	155	78	4	24	42	60	3	110	111	112	M4115x2	115	25	28	00	14	09	4	110	1100	1150
DJ.LDJ120-B7(X10)	456	155	8	4	24	42	60	3	120	122	122	M4125x2	125	40	32	09	14	19	4	120	1100	1150
DJ.LDJ130-B8(X11)	570	197	208	4	28	46	70	3	130	135	137	M140×2	140	150	32	19	14	132	14	135	1200	1400
DJ.LDJ140-B8(X11)	570	197	208	4	28	48	70	3	140	145	147	M150×2	150	160	36	28	16	42	16	44	1200	1400
DJ.LDJ180-B9(X12)	535	235	242	4	36	58	90	3	180	185	186	M190×3	190	200	45	165	18	180	18	182	1280	1400

Note: The increased height of the LDJ-type frame with its lower space height can accommodate 205, 206, 207 double-end mechanical seals.

5.3 SJ, LSJ types rack

The LSJ type rack is a taller type. The dimensions of the rack remain unchanged except that it is taller than the 12-value.

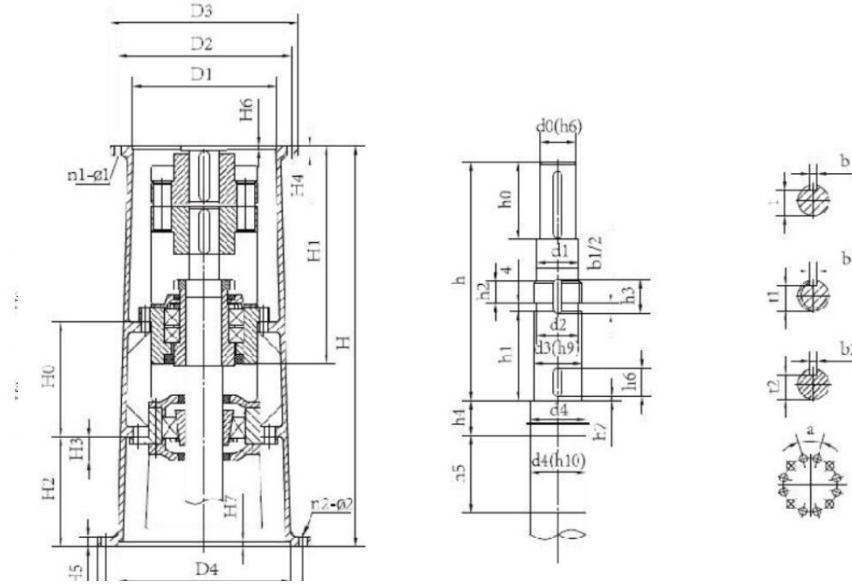


Main parameters and dimensions of SJ, LSJ types with double fulcrum frame

Rack code	H0	H1	H3	H4	H5	H6	H7	D1	D2	D3	n1-a	D4	D5	D6	d	n2-φ
SU.LSJ55-B3(X5)	450	402	58	22	24	6	6	270	310	340	6-φ13.5	325	400	435	30	12-φ14
SJ.LSJ65-B4(X6)	450	487	58	22	24	6	6	320(316)	360	400	8-φ15	350	420	460	30	12-φ18
SJ.LSJ70-B4(X6)	450	487	58	22	24	6	6	320(316)	360	400	8-φ15	350	420	460	30	12-φ18
SJ.SJ80-B4(X6)	450	545	60	25	28	6	8	320(316)	360	400	8-φ15	380	455	495	30	12-φ23
SJ.LSJ80-X7	450	545	60	25	28	6	8	345	390	430	8-φ18	380	455	495	30	12-φ23
SJ.LSJ80-B5(X8)	450	545	60	25	28	6	8	400	450	490	12-φ18	380	455	495	30	12-φ23
SJ.LSJ90-B5(X8)	600	569	69	25	40	7	8	400	450	490	12-φ18	430	510	555	30	12-φ23
SJ.LSJ100-B6(X9)	600	685	61	30	40	9	10	460(455)	520	580	12-φ22	480	560	600	22.5	16-φ23
SJ.LSJ110-B7(X10)	600	685	61	38	40	11	10	520	590	650	12-φ22	560	650	700	22.5	16-φ27
SJ.LSJ120-B7(X10)	600	685	61	38	40	11	10	520	590	650	12-φ22	560	650	700	22.5	16-φ27
S.LSJ130-B8(X11)	650	761	85	40	45	11	10	680	800	880	12-φ38	720	810	880	18	20-φ27
SJ.LSJ140-B8(X11)	650	761	85	40	45	11	12	680	800	880	12-φ38	720	810	880	18	20-φ27
S.LSJ180-B9(X12)	650	910	83	50	80	14	12	960	1080	1160	8-φ39	840	1080	1160	18	20-φ33

Rack code	Agitator shaft end size																				SJ type		LSJ type		
	h (B/X)	h0	h1	h2	h3	h4	h5	h6	h7	d0	d1	d2	M0	d3(h9)	d4	b	b1	t1	b2	t2	H	H2	H	H2	
SJ.LSJ55-B3(X5)	307/302	80	118	15	24	300	20	40	3	55	57	57	M60×2	60	65	16	49	8	56	8	56	1070	312	1220	462
SJ.LSJ65-B4(X6)	373	95	43	18	32	275	35	50	3	65	72	72	M75×2	75	80	18	58	10	69	10	70	140	307	1290	457
SU.LSJ70-B4(X6)	373/367	95	43	18	32	275	35	50	3	70	72	72	A75x	75	80	20	63	10	69	10	70	140	30	290	457
SU.LSJ80-B4(X6)	422	95	163	18	32	250	39	60	3	80	81	82	M85×2	85	90	22	71	10	79	10	80	1230	354	380	504
SJ.LSJ80-X7	422	95	163	18	32	250	39	60	3	80	81	82	M85×2	85	90	22	71	10	79	10	80	1230	354	380	504
SJ.LSJ80-B5(X8)	418	95	163	18	32	250	39	60	3	80	81	82	M85×2	85	90	22	71	10	79	10	80	1230	354	1380	04
SJ.LSJ90-B5(X8)	436	15	68	20	36	380	62	60	3	90	91	92	M95×2	95	110	25	81	12	89	12	90	1400	363	1550	513
SJ.LSJ100-B6(X9)	532/510	35	178	24	42	360	82	60	3	00	10	112	M115×2	115	125	28	90	14	109	14	109.5	1510	350	1710	550
SJ.LSJ110-B7(X10)	489	145	178	24	42	380	182	60	3	110	111	112	M115×2	115	125	28	100	14	109	14	109.5	1510	350	1710	550
SJ.LSJ120-B7(X10)	489	145	178	24	42	380	182	60	3	120	122	122	M125×2	125	140	32	09	14	19	14	119.5	1510	350	1710	550
SJ.LSJ130-B8(X11)	537	205	208	28	46	370	200	70	3	130	135	137	M140×2	140	50	32	19	14	32	14	134.5	1610	374	1810	574
S.LSJ140-B8(X11)	537	205	208	28	48	370	200	70	3	140	145	147	M150×2	150	160	36	128	16	4	16	144	1610	374	1810	574
SJ.LSJ180-B9(X12)	535	290	242	36	58	310	230	90	3	180	185	186	M150×3	190	200	45	165	18	180	18	182	1710	402	1920	602

Note: The increased height of the LSJ-type frame with its lower space height can accommodate 205, 206, 207 double-end mechanical seals.

5.4 DXJ-type rack

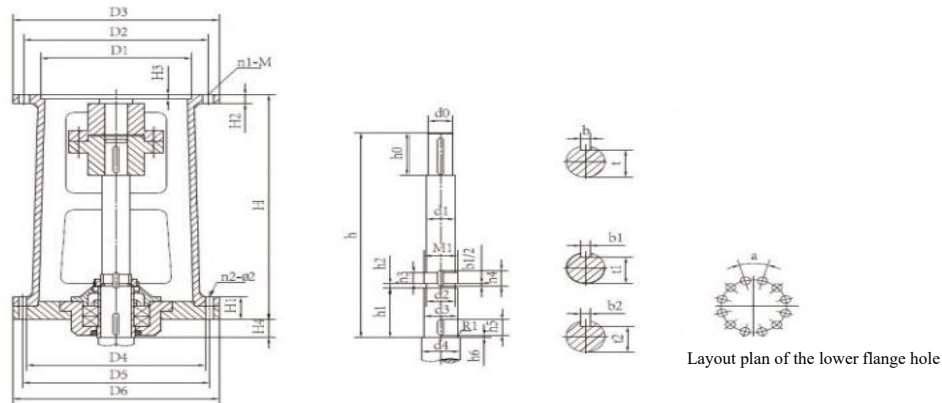


Main parameters and dimensions of DXJ-type single fulcrum frame

Rack model	H	H1	H2	H3	H4	Input interface				Output interface				
						D1	D2	D3	n1-M	D4	D5	D6	Q	n2-φ
DXJ30-B0	470	40	15	4	45	140	160	190	4-M10	240	285	315	30	12-φ14
DXJ30-B1(X3)	470	40	15	4	45	170	200	230	6-φ12	240	285	315	30	12-φ14
DXJ35-B1(X3)	524	48	15	5	47	170	200	230	6-M10	260	320	360	30	12-φ14
DXJ40-B2(X4)	524	48	15	4	47	200	230	260	6-φ12	260	320	360	30	12-φ14
DXJ45-B2(X4)	524	48	15	5	49	200	230	260	6-φ12	260	320	360	30	12-φ14
DXJ55-B3(X5)	580	55	20	6	47	270	310	340	6-φ13.5	325	400	435	30	12-φ14
DXJ65-B4(X6)	634	60	20	6	58	320(316)	360	400	8-φ15	350	420	460	30	12-φ18
DXJ70-B4(X6)	634	60	20	6	58	320(316)	360	400	8-φ15	350	420	460	30	12-φ18
DXJ80-B4(X6)	678	65	25	6	70	320(316)	360	400	8-φ15	380	455	495	30	12-φ18
DXJ80-X7	678	65	25	6	70	345	390	430	8-φ18	380	455	495	30	12-φ18
DXJ80-B5(X8)	678	65	25	6	70	400	450	490	12-φ18	380	455	495	30	12-φ18
DXJ90-B5(X8)	700	75	2	7	72	400	450	490	12-φ18	430	510	555	30	12-φ23
DXJ100-B6(X9)	740	80	25	9	76	460(455)	520	580	12-φ22	480	460	600	22.5	16-φ23
DXJ110-B7(X10)	840	80	30	11	76	520	590	650	12-φ22	560	650	700	22.5	16-φ27
DXJ120-B7(X10)	840	80	30	11	76	520	590	650	12-φ22	560	650	700	22.5	16-φ27
DXJ130-B8(X11)	950	94	30	11	85	680	800	880	12-φ38	720	810	880	18	20-φ27
DXJ140-B8(X11)	950	94	30	11	85	680	800	880	12-φ38	720	810	880	18	20-φ27
DXJ180-B9(X12)	1050	100	40	14	115	960	1080	1160	8-φ39	970	1080	1160	18	20-φ33

Rack model	Agitator shaft end size																			
	h (B/X)	h0	h1	h2	h3	h4	h5	h6	d0	d1	d2	M1	d3	d4	b	t1	b1	t1	b2	t2
DXJ30-B0	431/445	53	103	3	13	22	30	3	30	32	32.8	M35×1.5	35	40	8	26	6	31	6	31.5
DXJ30-B1(X3)	431/445	53	103	3	13	22	30	3	30	32	32.8	M35×1.5	35	40	8	26	6	31	6	31.5
DXJ35-B1(X3)	490	53	113	3	15	24	40	3	35	42	42.8	M45×1.5	45	50	10	30	6	41	6	41.5
DXJ40-B2(X4)	479/482	69	113	3	15	24	40	3	40	42	42.8	M45×1.5	45	50	12	35	6	41	6	41.5
DXJ45-B2(X4)	481	69	113	3	15	28	40	3	45	47	47.8	M50×1.5	50	65	14	39.5	8	46	8	46
DXJ55-B3(X5)	530	80	118	4	15	27	40	3	55	57	57	M60×2	60	65	16	49	8	56	8	56
DXJ65-B4(X6)	590	87	143	4	18	32	50	3	65	71	72	M75×2	75	80	18	58	10	69	10	70
DXJ70-B4(X6)	590/580	87	143	4	18	32	50	3	70	71	72	M75×2	75	80	20	62.5	10	69	10	70
DXJ80-B4(X6)	630/590	91	163	4	18	32	60	3	80	81	82	M85×2	85	90	22	71	10	79	10	80
DXJ80-X7	630/590	91	163	4	18	32	60	3	80	81	82	M85×2	85	90	22	71	10	79	10	80
DXJ80-B5(X8)	618	91	163	4	18	32	60	3	80	81	82	M85×2	85	90	22	71	10	79	10	80
DXJ90-B5(X8)	636	125	168	4	20	36	60	3	90	91	92	M95×2	95	110	25	81	12	89	12	90
DXJ100-B6(X9)	667/635	134	178	4	24	42	60	3	100	111	112	M115×2	115	25	28	90	14	109	14	110
DXJ110-B7(X10)	712	155	178	4	24	42	60	3	110	111	112	M115×2	115	125	28	100	14	109	14	110
DXJ120-B7(X10)	712	155	178	4	24	42	60	3	120	122	122	M125×2	125	140	32	109	14	119	14	120
DXJ130-B8(X11)	815	197	208	4	28	46	70	3	130	135	137	M140×2	140	50	32	119	14	132	14	135
DXJ140-B8(X11)	815	197	208	4	32	52	70	3	140	45	47	M150×2	150	60	36	128	16	142	16	144
DXJ180-B9(X12)	790	290	242	4	36	58	90	3	180	180	86	M190×3	190	200	45	165	18	180	18	182

5.5 JXD-type rack

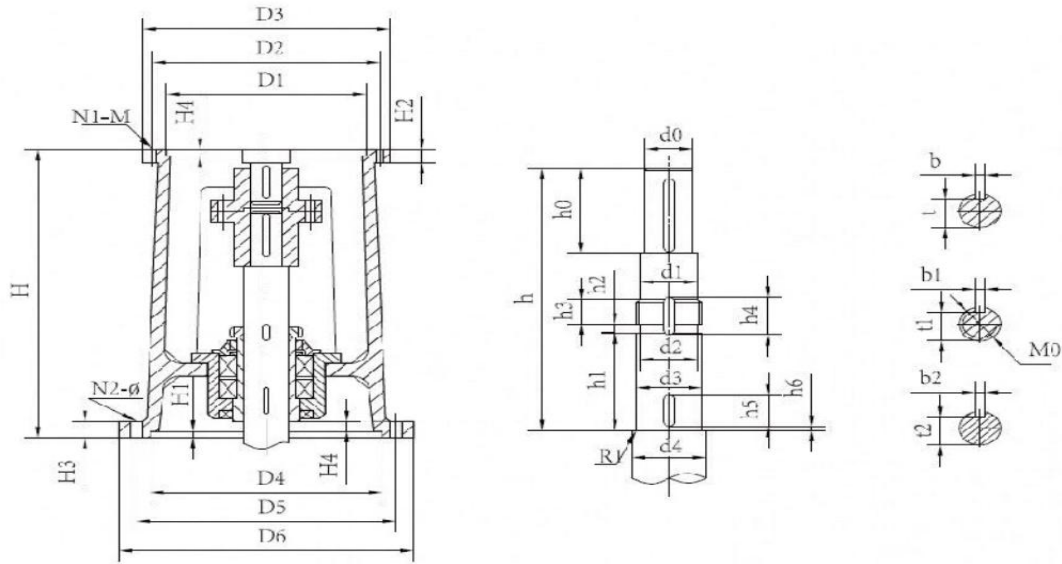


Main parameters and dimensions of JXD-type single fulcrum frame

Rack model	H	H1	H2	H3	H4	Input interface				Output interface			
						D1	D2	D3	N1-M	D4	D5	D6	n2-φ
JXD35-B1(X3)	450	6	15	24	32	170	200	230	6-M10	315	362	405	12-φ18
JXD40-B2(X4)	450	6	15	24	32	200	230	260	6-M10	315	362	405	12-φ18
JXD45-B2(X4)	450	6	15	24	22	200	230	260	6-M10	315	362	405	12-φ18
JXD55-B3(X5)	450	8	20	28	25	270	310	340	6-φ13.5	315	362	405	12-φ18
JXD70-B4(X6)	500	8	20	28	23	320(316)	360	400	8-φ15	325	390	435	12-φ18
JXD80-B4(X6)	540	8	25	30	9	320(316)	360	400	8-φ15	365	432	485	12-φ23
JXD80-X7	540	8	25	30	9	345	390	430	8-φ18	365	432	485	12-φ23
JXD90-B5(X8)	580	8	25	30	20	400	450	490	12-φ18	400	476	565	12-φ26
JXD100-B6(X9)	580	8	25	35	15	460(455)	520	580	12-φ22	400	476	565	12-φ26
JXD110-B7(X10)	650	10	30	40	15	520	590	650	12-φ22	480	540	685	12-φ26
JXD120-B7(X10)	650	10	30	40	15	520	590	650	12-φ22	480	540	685	12-φ26
JXD130-B8(X11)	800	10	45	45	20	680	800	880	12-φ38	560	635	880	20-φ27
JXD140-B8(X11)	800	10	45	45	20	680	800	880	12-φ38	560	635	880	20-φ27

Rack model	Agitator shaft end size																				
	h (B/X)	h1	h2	h3	h4	h5	h6	h0	d0	d1	d2	M0	d3	d4	R1	b	t	b1	t1	b2	t2
JXD35-B1(X3)	340	113	3	15	24	40	3	53	35	42	42.8	M45×1.5	45	50	1	10	30	6	41	6	41.5
JXD40-B2(X4)	324	113	3	15	24	40	3	69	40	42	42.8	M45×1.5	45	50	1	12	35	6	41	6	41.5
JXD45-B2(X4)	334	113	3	15	28	40	3	69	45	47	47	M50×1.5	50	65	1	14	39.5	8	46	8	46
JXD55-B3(X5)	325	118	4	15	28	40	3	80	55	57	57	M60×2	60	65	1	16	49	8	56	8	56
JXD70-B4(X6)	355	143	4	18	32	50	3	87	65	71	72	M75×2	75	80	1	18	58	10	69	10	70
JXD80-B4(X6)	363	163	4	18	32	60	3	91	80	82	82	M85×2	85	90	1.5	22	71	10	79	10	80
JXD80-X7	411	163	4	18	32	60	3	91	80	82	82	M85×2	85	90	1.5	22	71	10	79	10	80
JXD90-B5(X8)	415	168	4	20	36	60	3	125	90	92	92	M95×2	95	110	.5	25	81	12	89	12	90
JXD100-B6(X9)	410/385	178	4	24	42	60	3	134	100	111	112	M115×2	115	125	2	28	90	14	109	14	109.5
JXD110-B7(X10)	431	178	4	24	42	60	3	155	110	112	112	M115×2	115	125	2	28	100	14	109	14	109.5
JXD120-B7(X10)	431	178	4	24	42	60	3	155	120	122	122	M125×2	125	140	2	32	109	14	119	14	119.5
JXD130-B8(X11)	560	208	4	28	46	70	3	197	130	135	137	M140×2	140	150	2	32	119	14	132	14	134.5
JXD140-B8(X11)	560	208	4	28	46	70	3	197	140	145	146	M150×2	150	160	2	36	128	16	142	16	144


5.6 JXLD-type rack (74 standard) (Tianjin standard)

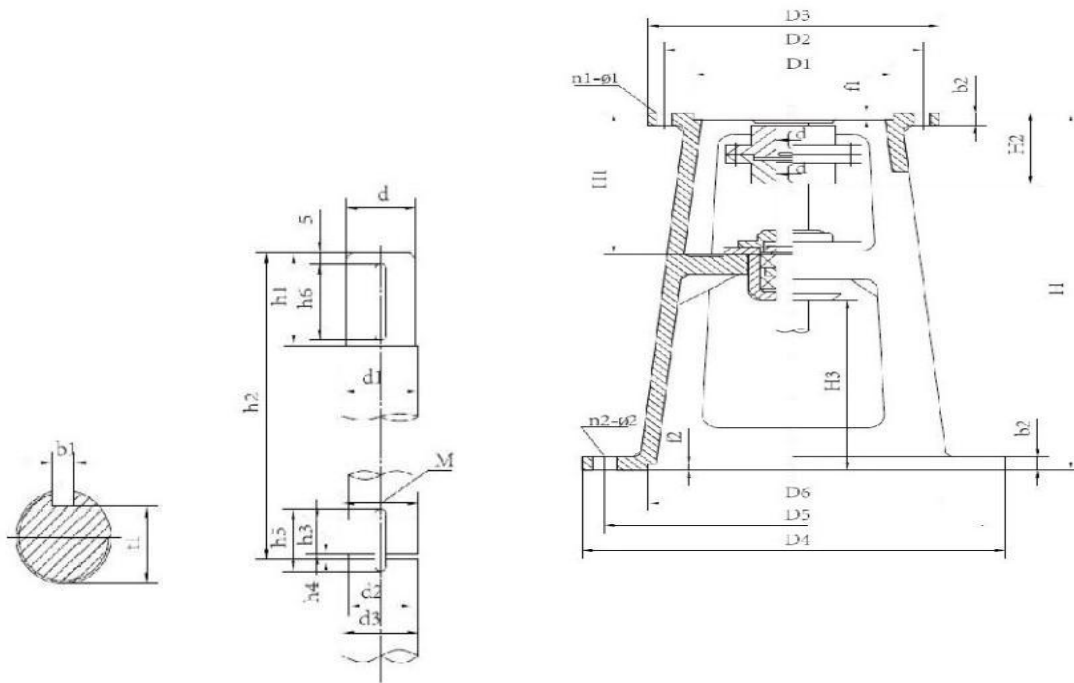

Main parameters and dimensions of JXLD-type rack (74 standard)

Rack model	d	Agitator shaft end size													Input interface size						Output interface size					H1	H2	H3	H	
		d1	M	d2	d3 (k6)	h1	h2	h3	h4	h5	h6	b	t	b1	t1	D3	D2	D1	f1	b2	n1-01	D4	D5	D6 H9	f2					n2-22
JXLD3	35	40	M45×1.5	43	45	60	215	10	3	16	50	10	30	6	41	230	200	170	4	18	6-12	410	360	300	6	6-18	291	136	170	520
JXLD4	45	50	M55×2	52	55	75	235	14	4	22	69	14	40	8	51	260	230	200	4	18	6-12	450	400	335	6	6-18	335	75	155	570
JXLD5	55	60	M65×2	62	65	75	301	14	4	22	70	16	49	8	61	340	310	270	6	22	6-13	500	450	385	6	8-18	404	178	157	650
JXLD6	65	70	M75×2	72	75	90	277	16	4	25	85	18	58	10	70	400	360	316	6	22	8-16	530	480	410	6	2-18	402	215	168	660
JXLD7	80	85	M90×2	87	90	105	316	20	4	30	100	22	71	12	84	430	390	345	6	24	8-18	565	510	430	8	2-22	441	230	194	740
JXLD8	90	95	M100×2	97	100	25	320	20	4	30	20	25	81	12	94	490	450	400	7	28	2-18	565	510	430	8	12-22	471	276	212	800
JXLD9	100	105	M110×2	107	110	125	308	20	4	31	20	28	90	14	104	580	520	455	9	30	12-22	580	520	455	10	12-22	496	313	19	810
XLD10	110	115	M120×2	117	120	55	26	24	4	35	150	28	100	14	114	550	590	520	11	30	2-22	650	590	520	10	12-22	475	363	221	830
JXLD1	130	135	M140×2	137	40	55	301	28	4	39	50	32	19	14	132	880	800	680	12	30	12-38	880	800	680	12	12-37	521	375	185	850
JXLD12	180	190	M200×2	196	200	284	377	36	4	48	280	45	165	16	190	1160	1020	900	14	45	8-39	1160	1020	900	12	8-39	757	664	235	1200

5.7 TJ-type rack

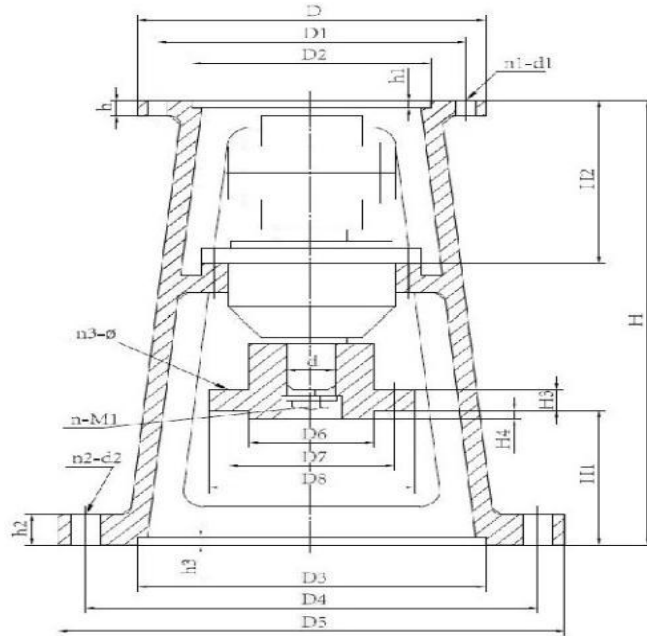


Main parameters and dimensions of TJ-type frame with JA jacketed coupling underneath

Rack model	Input interface						Output interface						H	H1	H2	H3	d	D6	D7	D8	n3-2	n-M1
	D	D1	D2	h	h1	n1-d1	D3	D4	D5	h2	h3	n2-d2										
TJ1-B1(X3)	230	200	170	20	6	6-12	220	270	305	22	7	4-24	514	201	185	15	35	60	110	140	4-13.5	1-10
TJ2-B1(X3)	230	200	170	20	6	6-12	250	300	335	22	7	4-24	517	197	190	15	35	60	110	140	4-13.5	1-10
TJ2-B2(X4)	260	230	200	20	7	6-13	250	300	335	25	7	4-24	530	176	210	20	45	85	120	160	4-13.5	1-12
TJ3-B2(X4)	260	230	200	20	7	6-13	295	350	392	26	7	4-26	560	206	210	20	45	85	120	160	4-13.5	1-12
TJ3-B3(X5)	340	310	270	20	7	6-13	295	350	392	26	7	4-26	560	191	210	20	45	85	120	160	4-13.5	1-12
TJ4-B3(X5)	340	310	270	20	7	6-13	345	400	442	26	7	4-26	635	245	215	22	55	100	150	180	4-18	1-16
TJ5-B3(X5)	340	310	270	22	7	6-13	390	450	498	26	7	4-30	635	250	215	22	55	100	150	180	4-18	1-16
TJ6-B4(X6)	400	360	320/316	22	7	8-16	435	500	548	30	7	8-30	736	276	250	28	70	110	165	200	4-18	1-16
TJ7-B5(X8)	490	450	400	26	10	12-18	440	550	600	30	10	12-22	805	241	296	36	90	150	190	230	6-18	1-16
TJ8-B6(X9)	580	520	460(455)	28	10	12-22	500	550	600	32	10	12-22	820	192	362	36	100	140	200	240	6-18	1-16
TJ9-B7(X10)	650	590	520	30	12	12-22	560	650	700	35	10	12-27	1100	355	455	36	110	150	250	290	6-27	1-16
TJ10-B8(X11)	880	800	680	45	12	12-38	720	810	880	45	10	20-27	1200	304	550	40	130	180	290	350	6-27	1-16

Note: TJ6 and TJ7 can be equipped with XL7 reducer. Please specify when ordering.


5.8 TJQ-type rack

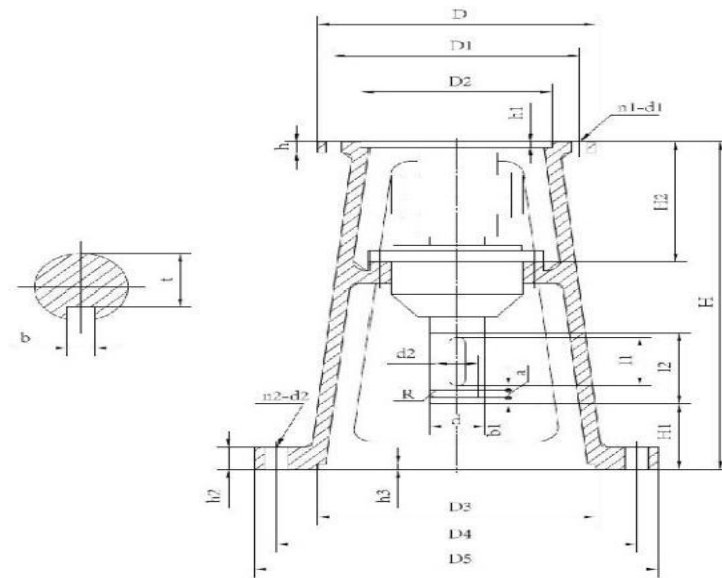

Main parameters and dimensions of TJQ-type frame with JQ jacketed coupling underneath

Rack model	d (h7)	Input interface						Output interface						H	H1	H2	l1	l2	a (H11)	b1	d2 (h11)	b	t	Coupling Shaft model
		D	D1	D2	h	h1	n1-d1	D3	D4	D5	h2	h3	n2-d2											
TJQ1-B1(X3)	35	230	200	170	18	5	6-12	220	270	305	22	7	4-24	514	173	185	55	85	5	4	30	10	30	JQ35
TQ2-B1(X3)	35	230	200	170	20	6	6-13.5	250	300	335	22	7	4-24	517	182	190	55	85	5	4	30	10	30	JQ35
TJQ2-B2(X4)	45	260	230	200	20	6	6-13.5	250	300	335	22	7	4-24	530	175	210	70	100	6	5	37	14	39.5	JQ45
TJQ3-B2(X4)	45	260	230	200	20	6	6-13.5	295	350	392	25	7	4-26	560	191	210	70	100	6	5	37	14	39.5	JQ45
TJQ3-B3(X5)	45	340	310	270	20	6	6-13.5	295	350	392	26	7	4-26	560	191	210	70	100	6	5	37	14	39.5	JQ45
TJQ4-B3(X5)	55	340	310	270	20	6	6-13.5	345	400	442	26	7	4-26	635	253	210	70	100	6	5	47	16	49	JQ55
TJQ5-B3(X5)	55	340	310	270	20	6	6-13.5	390	450	498	26	7	4-30	635	258	215	70	100	6	5	47	16	49	JQ55
TJQ6-B4(X6)	70	400	360	320(316)	22	6	8-16	435	500	548	26	7	8-30	736	284	250	100	130	8	6	60	20	62.5	JQ70
TJQ7-B5(X8)	90	490	450	400	25	7	12-18	440	550	600	28	10	12-22	805	233	296	140	170	10	8	80	25	81	JQ90
TJQ8-B6(X9)	100	580	520	460(455)	26	10	12-22	500	550	600	30	10	12-22	820	187	362	140	170	10	8	90	28	90	JQ100
TJQ9-B7(X10)	110	650	590	520	30	12	12-22	560	650	700	40	10	12-27	1100	210	455	160	200	12	10	100	28	100	Q110
TQ10-B8(X11)	130	880	800	680	40	12	12-38	720	810	880	45	10	20-27	1200	297	550	180	225	14	12	118	32	119	JQ120


5.9 TJA-type (new standard) rack

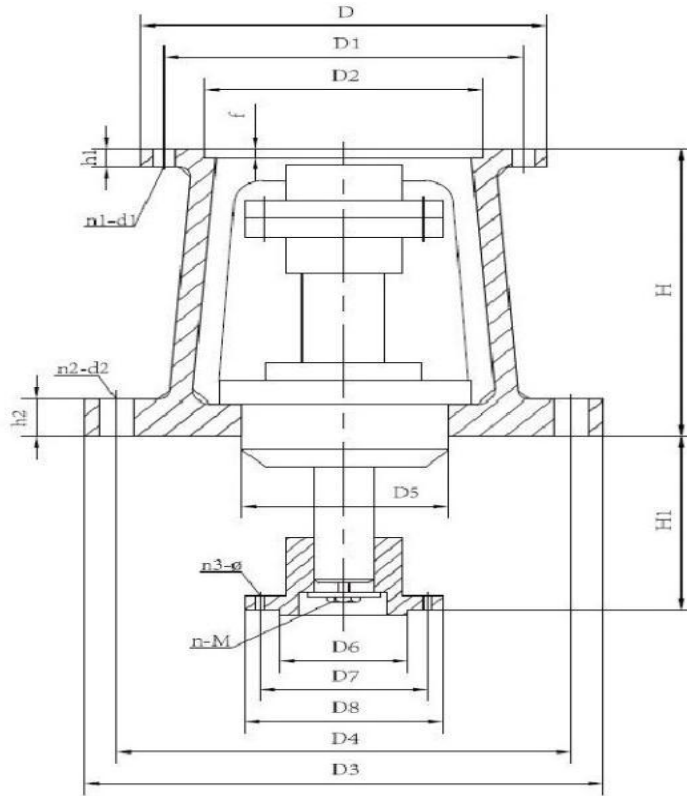

Main parameters and dimensions of TJA-type (new standard) rack

Rack model	Reducer model	Input interface						Output interface				H	H1	D5	D6	D7	D8	n3-φ	n-A
		D	D1	D2	h1	f	n1-d1	D3	D4	h2	n2-d2								
TJA1	B1(X3)	230	200	170	16	5	6-12	270	235	17	4-12	215	115	115	60	110	140	4-12	1-10
TJA2	B2(X4)	260	230	200	20	6	6-12	310	270	20	4-18	240	135	115	85	120	160	4-13	1-12
TJA3	B3(X5)	340	310	270	22	6	6-14	370	320	22	4-20	290	162	160	100	150	180	4-18	1-12
TJA4	B4(X6)	400	360	320(316)	22	7	8-16	455	400	24	6-20	315	185	160	110	165	200	4-18	1-16
TJA5	B5(X8)	490	450	400	25	7	12-18	545	495	26	8-22	332	230	240	150	190	230	6-18	1-20
TJA6	B6(X9)	580	520	460(455)	25	10	12-22	600	550	35	12-22	400	210	245	140	200	240	6-18	1-20
TJA7	B7(X10)	650	590	520	25	11	12-22	680	620	35	12-22	450	240	270	150	250	290	6-27	1-20

5.10 JAI large flange frame (69 standard) and JAI special rack for glass-lined reaction tank (69 standard)

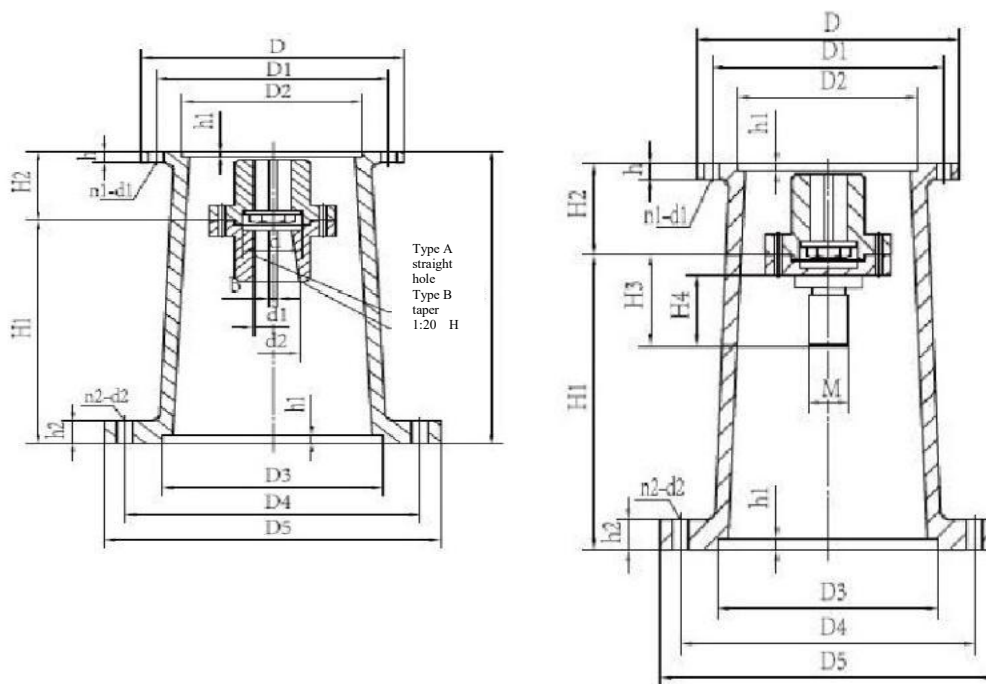

Main parameters and dimensions of JAI-type unpivoted rack (69 standard)

Rack model	Reducer model	Input interface						Output interface					H1	H2	H3	H4	d	A-type straight hole		B-type tapered hole 1:20	
		D	D1	D2	h	h1	n1-d1	D3	D4	D5	h2	n2-d2						d1	b	d2	b
JAI0	B0(X2)	90(180)	160	40(130)	16	5	4-12(6-M10)	165	210	250	16	6-12	205	55	55	18	45	30(25)	8		
JAI1	B1(X3)	230	200	170	16	5	6-12	215	260	290	16	8-12	226	84	75	25	50	35	10	35	10
JAI2	B2(X4)	260	230	200	20	6	6-12	290	350	380	20	8-14	250	96	90	30	70	45	14	50	14
JAI3	B3(X5)	340	310	270	22	6	6-13.5	360	440	480	22	8-18	300	112	110	30	80	55	16	60	16
JAI4	B4(X6)	400	360	320(316)	22	7	8-15	440	530	580	25	8-22	384	141	130	40	90	70(65)	20	70	20
JAI5	B50X8	490	450	400	25	7	12-18	450	550	600	28	8-22	390	160	150	40	115	90	25	85	25

Note: This frame is equipped with rigid coupling, and the upper coupling is JA-type straight hole. While the lower coupling is JA-type straight hole or B-type tapered hole with taper of 1:20. The frame is unsupported and is used when the axial forces from the reactor are not significant.

Main parameters and dimensions of JAI (69 standard) unsupported rack with threaded coupling

Rack model	Reducer Model	Input interface						Output interface					H1	H2	H3	H4	M	Volume of reaction tank (L)
		D	D1	D2	h	h1	n1-d1	D3	D4	D5	h2	n2-d2						
JAI1	B1(X3)	230	200	170	16	5	6-12	215	260	290	16	8-12	226	84	93	50	M33X2	50-100
																	120	60
JAI2	B2(X4)	260	230	200	20	6	6-12	230	300	345	20	4-18	254	96	120	60	M42×3	200-300
																	M48×3	500
JAI3	B3(X5)	340	310	270	22	6	6-13.5	320	400	460	22	4-20	328	112	120	80	M60×4	1000
																	M68×4	1500
																	M78×4	2000
JAI4	B4(X6)	400	360	320(316)	22	7	8-15	440	530	580	25	8-22	384	141	130	80	M78×4	3000
JA//5	B5(X8)	490	450	400	25	7	12-18	450	550	600	28	8-22	390	160	130	80	M78×4	5000

Note: JA4 can be equipped with XL7 reducer. Please specify when ordering.